

REQUEST FOR PROPOSALS  
BID #24-12  
DEMOLITION PROJECTS

1. 301 N State, Ridge Farm PIN: 33-30-305-011
2. 300 N State, Ridge Farm PIN: 33-30-304-020
3. 207 N Harrison, Oakwood PIN: 21-12-402-014
4. 350 E Franklin St, Paxton PIN: 11-14-17-152-007
5. 616 N Market St, Paxton PIN: 11-14-08-159-015

## **SITE PICTURES AND DRAWINGS**




# Pre Demolition: 300 N State, Ridge Farm



# 300 N State, Ridge Farm

## PIN: 33-30-304-020

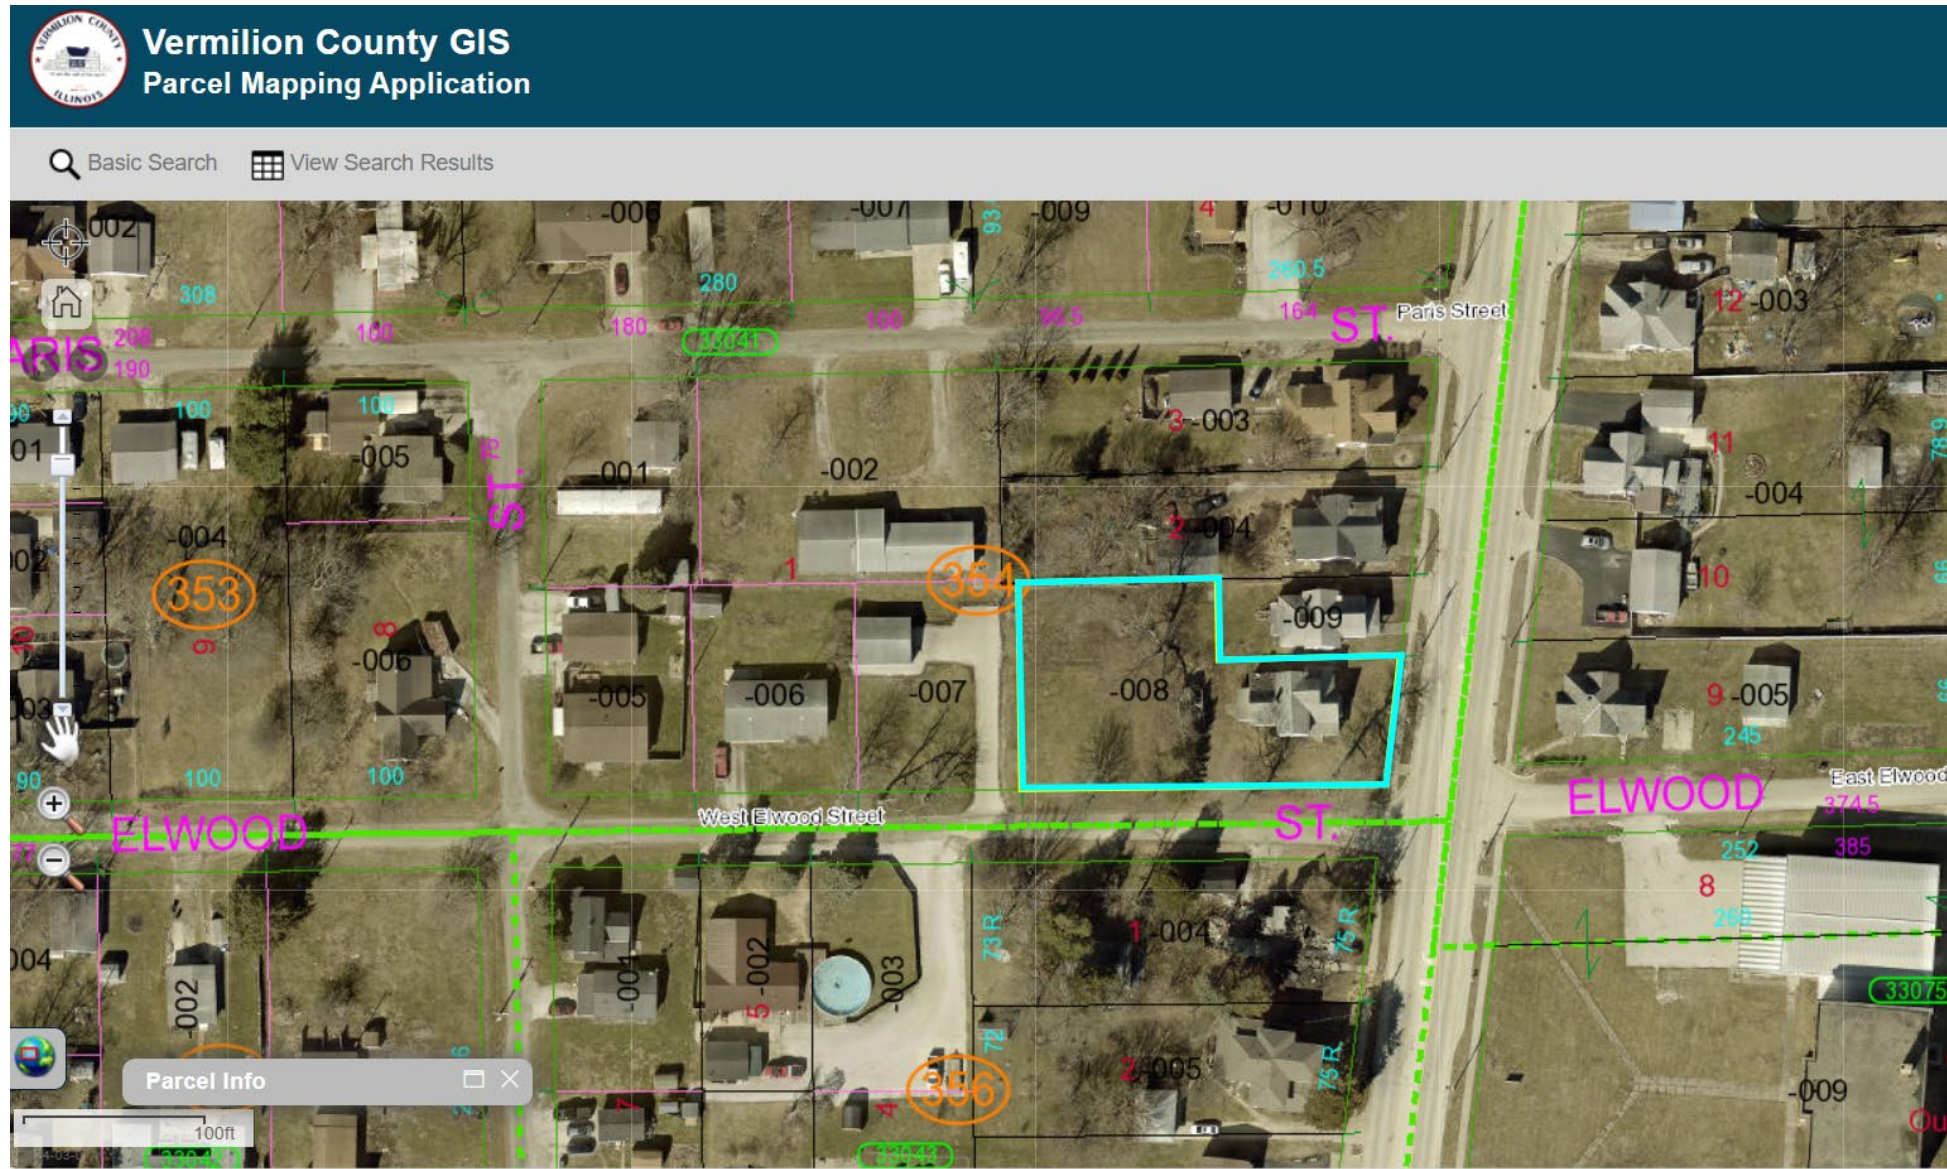


# Pre Demolition: 301 N State, Ridge Farm



# 301 N State, Ridge Farm

## PIN: 33-30-305-011

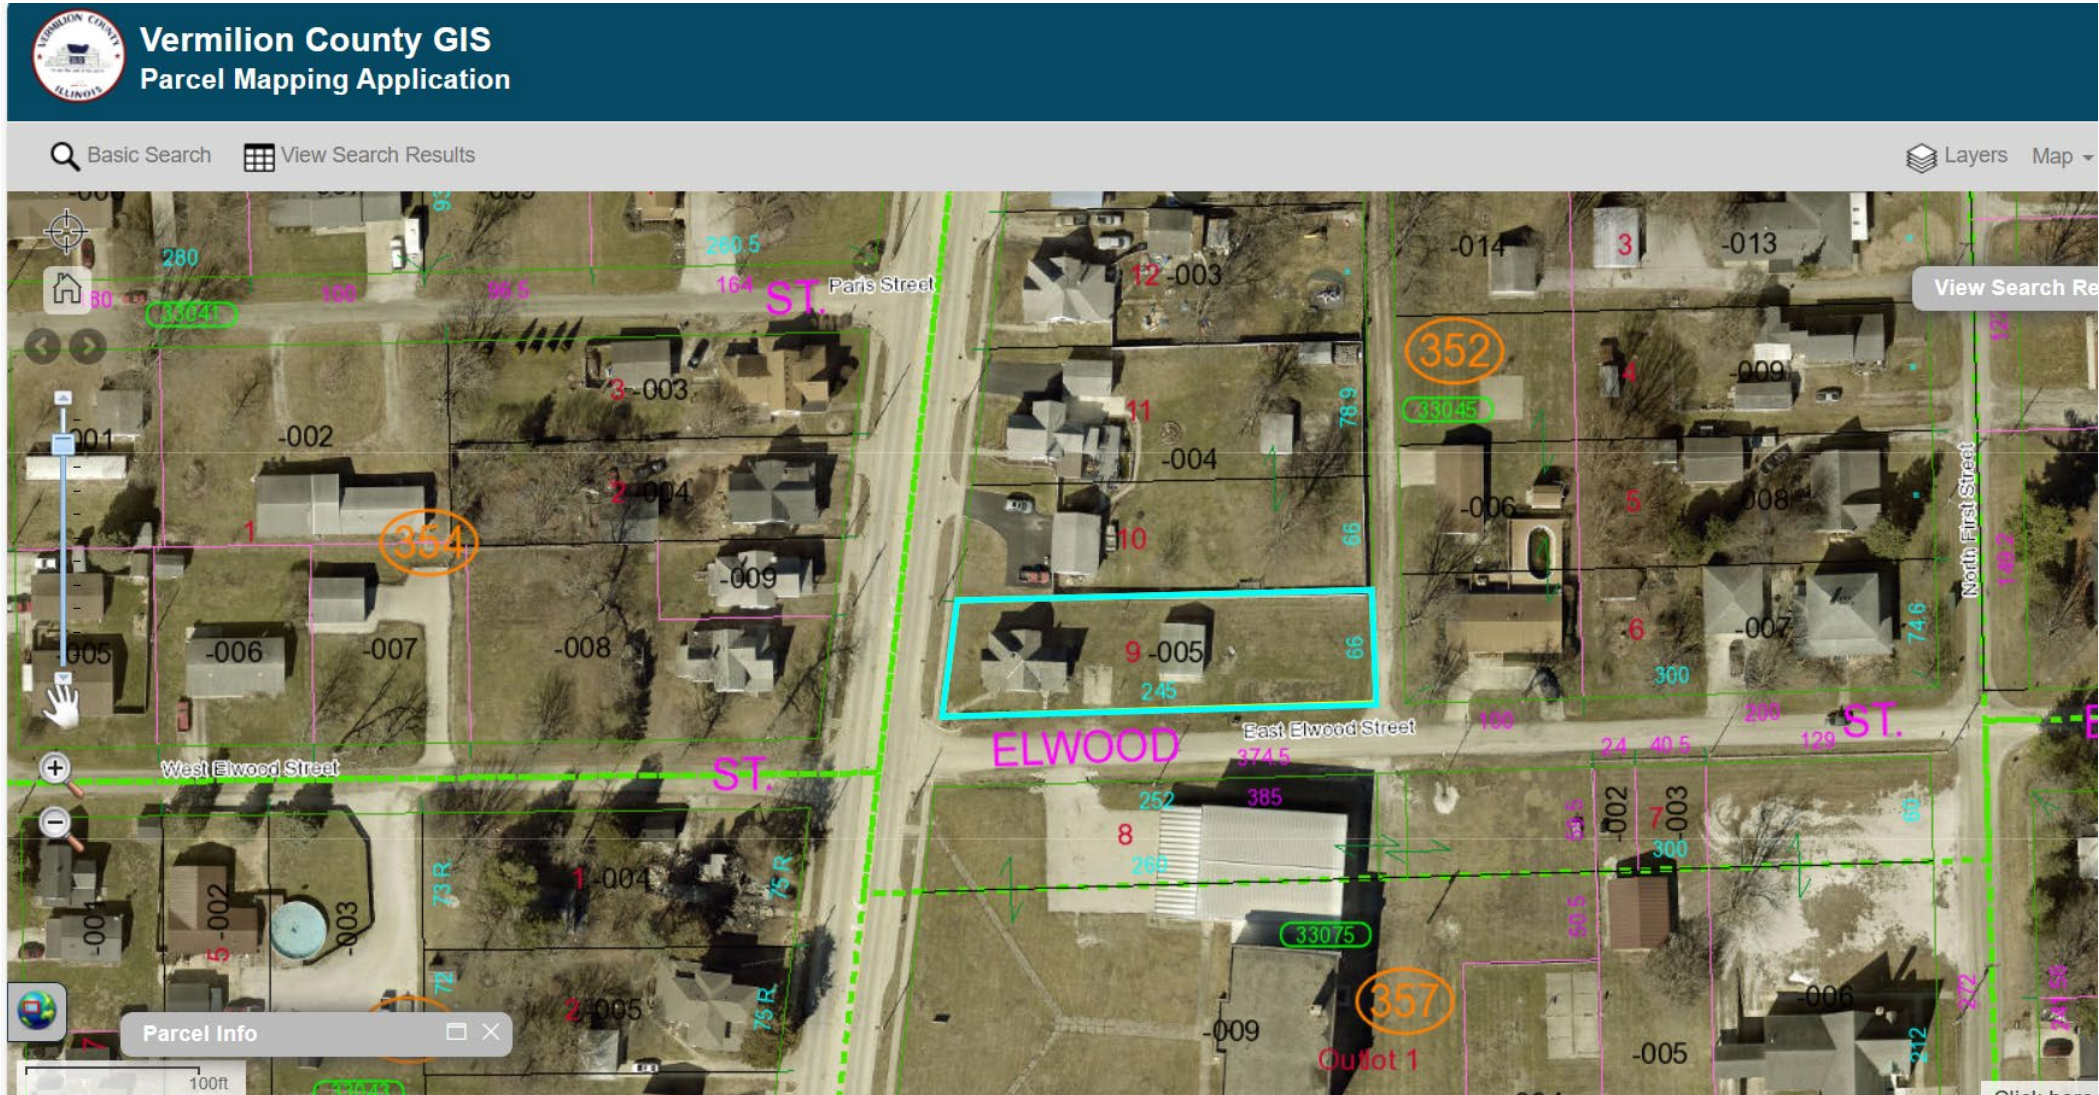


# Pre Demolition: 207 N Harrison, Oakwood



# 207 N Harrison, Oakwood

## PIN: 21-12-402-014

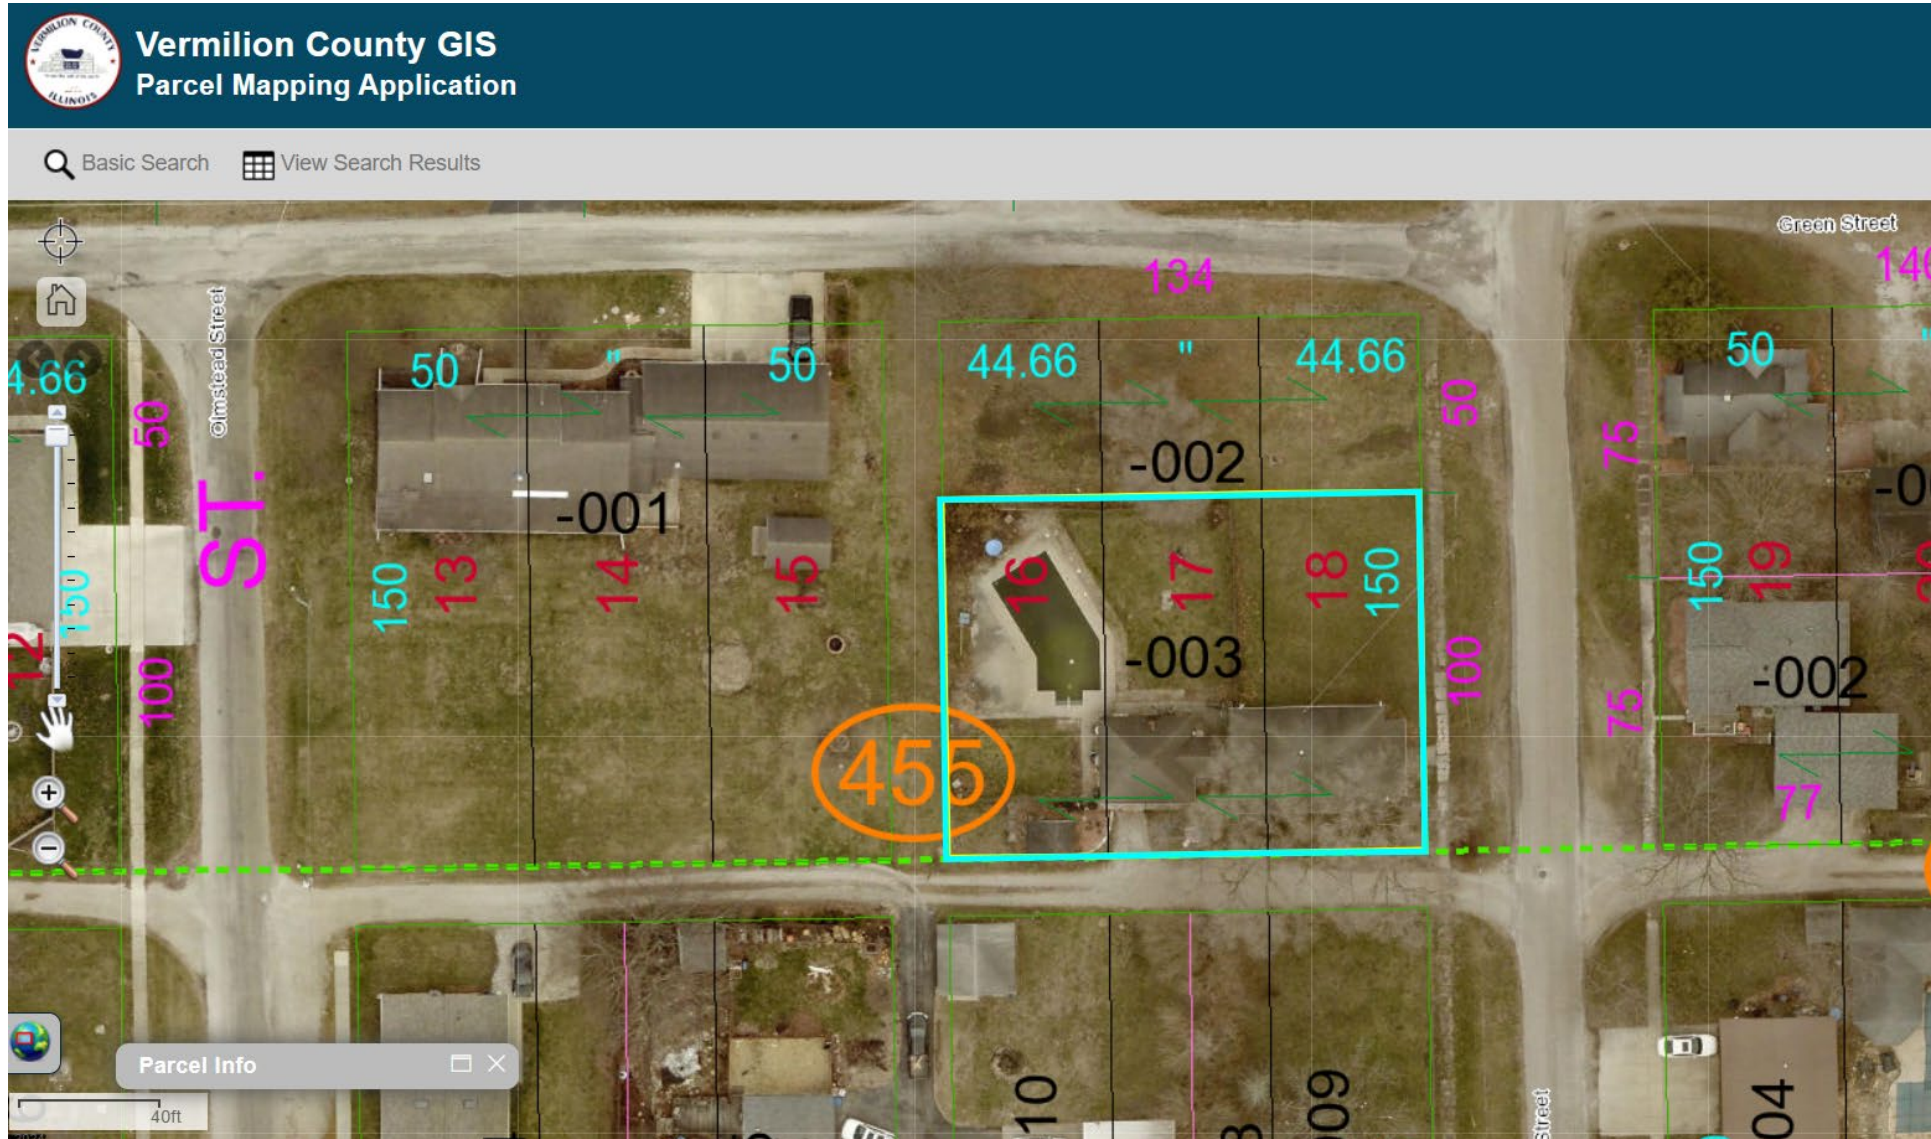


# Pre Demolition: 350 E Franklin, Paxton



# 350 E Franklin, Paxton

## PIN: 11-14-17-152-007

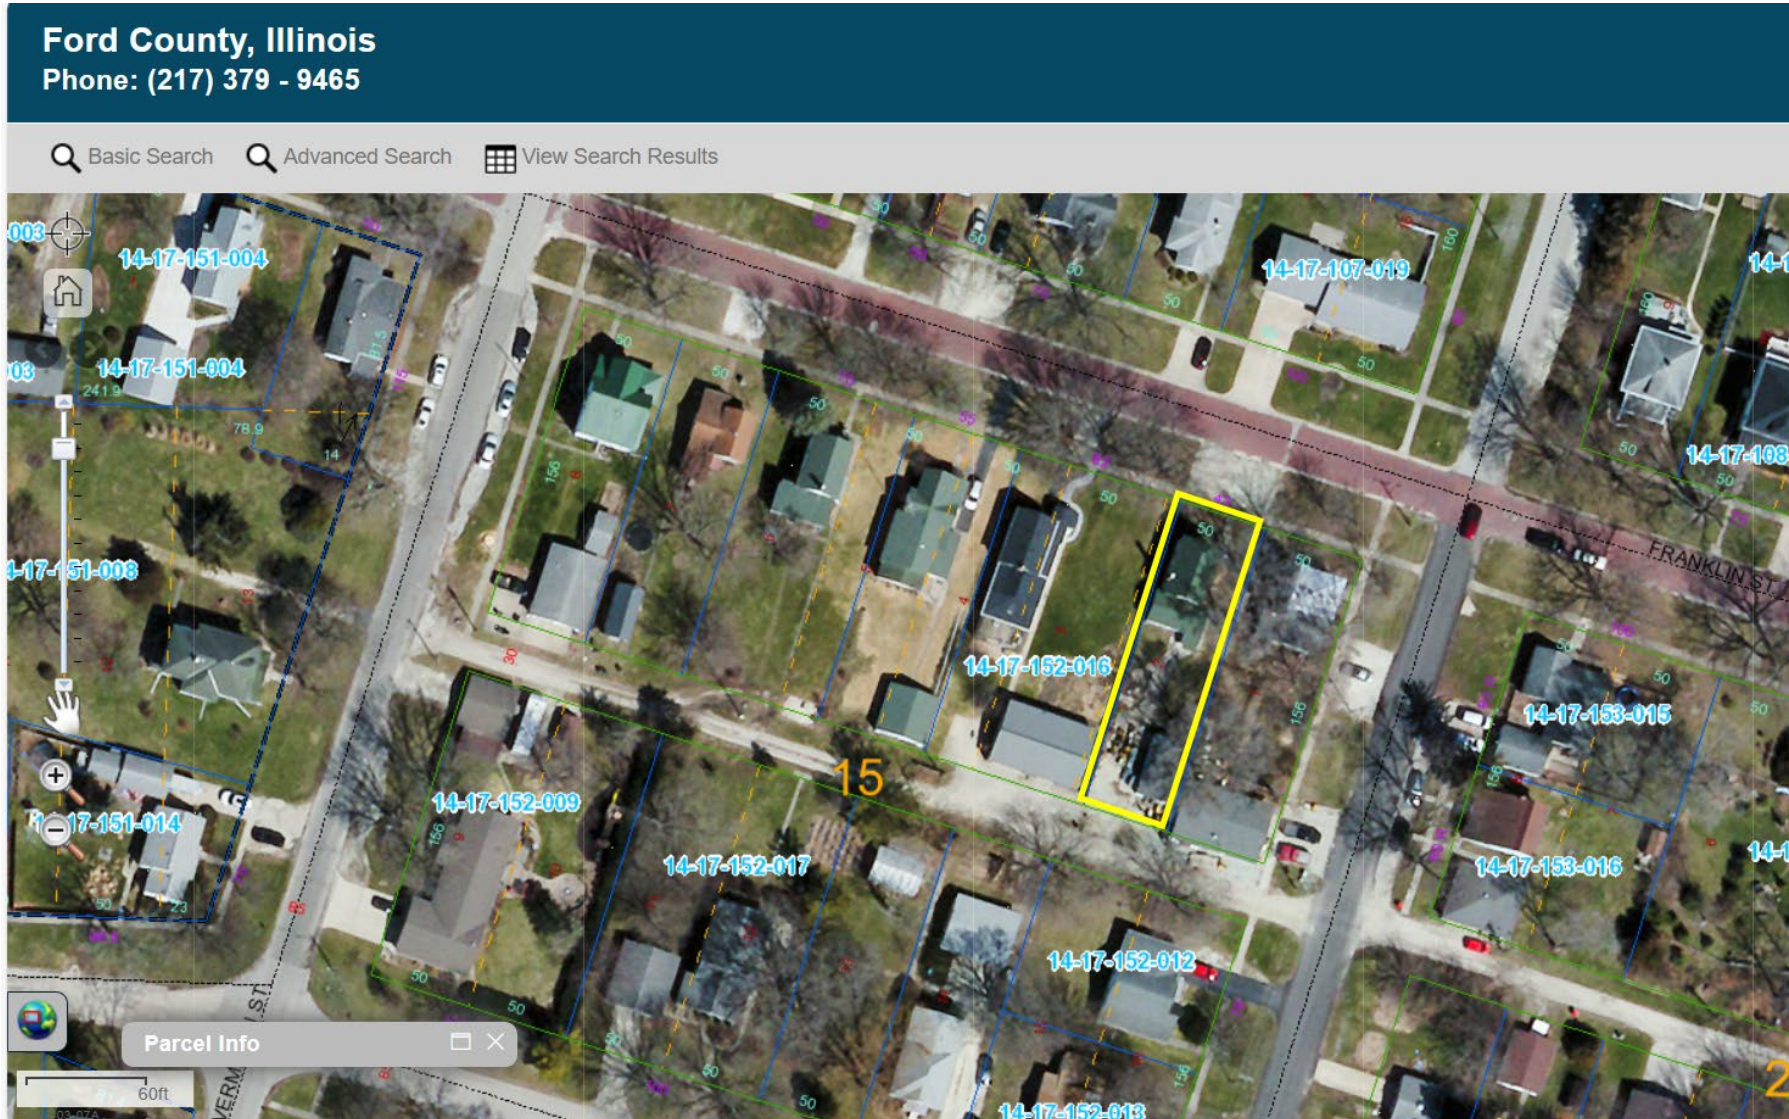


# Pre Demolition: 616 N Market, Paxton



# 616 N Market, Paxton

## PIN: 11-14-08-159-015

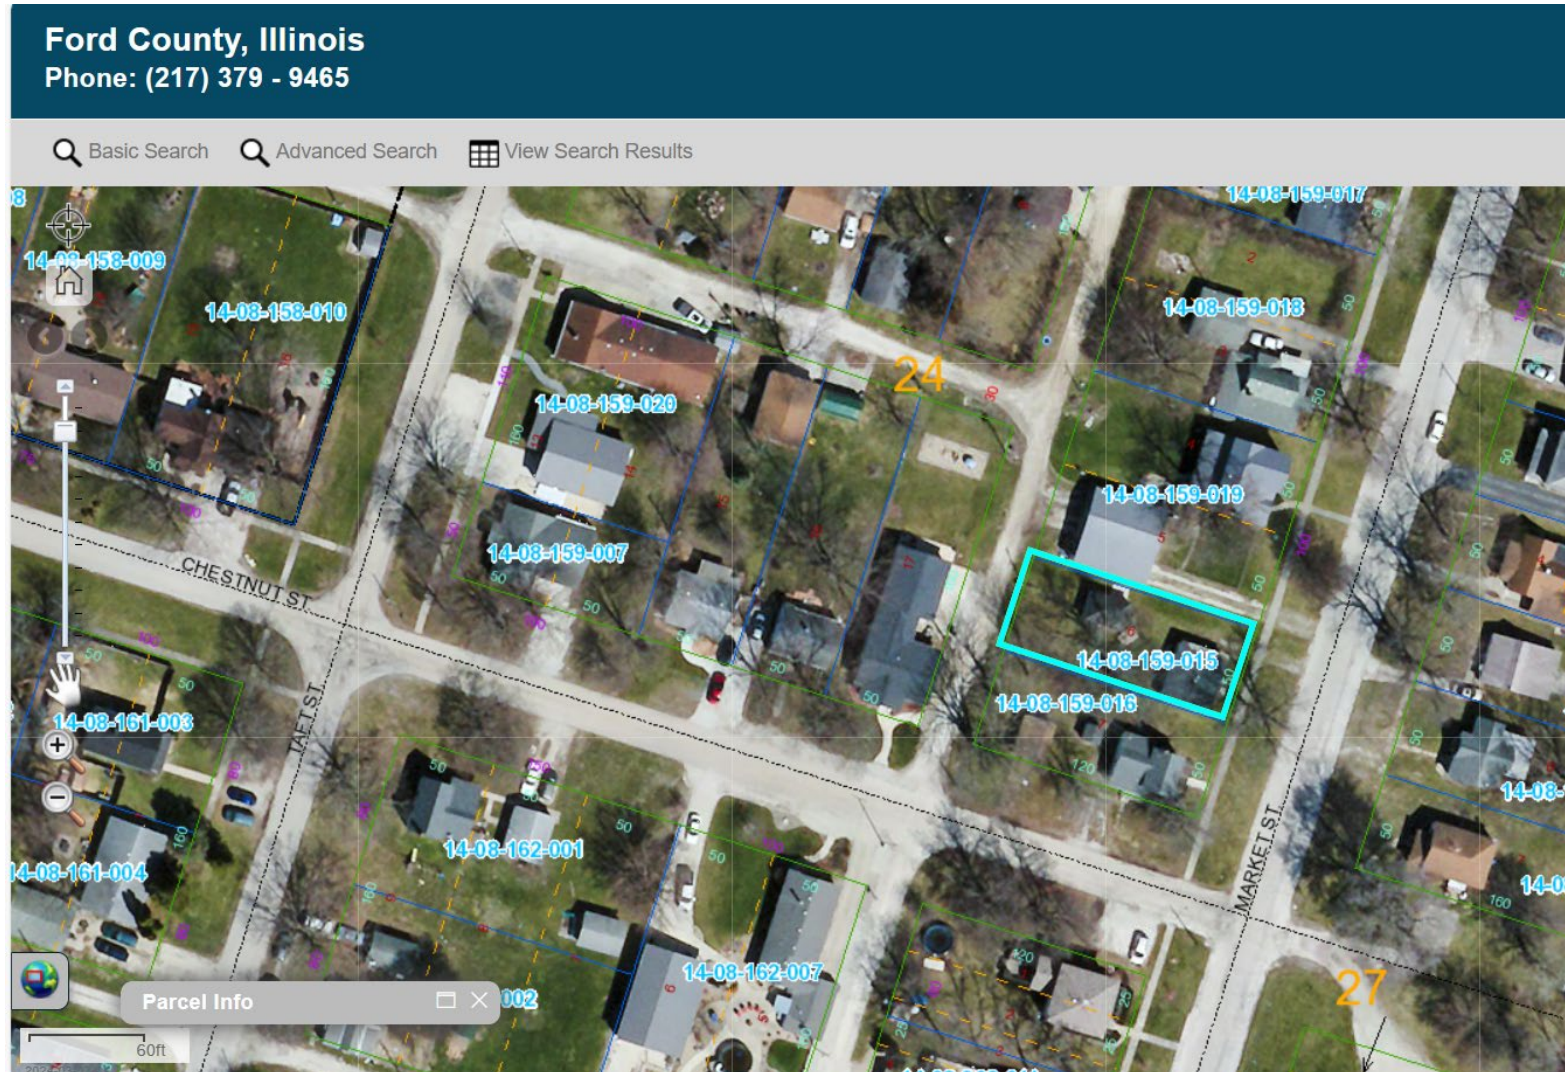

## NOTICE TO BIDDERS

BID #24-12

### 1. SUMMARY OF THIS REQUEST FOR PROPOSALS

The Central Illinois Land Bank Authority (“**CILBA**”) seeks Construction Services from interested and qualified firm(s), namely:

Demolition of all structures; removal of all building materials and debris; and backfill of soils and restoration of soils to ensure appropriate site drainage and not impede future site development of the structures on the following properties (“**Target Structures**”):

- a) 301 N State, Ridge Farm PIN: 33-30-305-011
- b) 300 N State, Ridge Farm PIN: 33-30-304-020
- c) 207 N Harrison, Oakwood PIN: 21-12-402-014
- d) 350 E Franklin St, Paxton PIN: 11-14-17-152-007
- e) 616 N Market St, Paxton PIN: 11-14-08-159-015

Services shall be performed at a standard that meets or exceeds those of the governing municipal jurisdictions (county, state, federal). Interested bidders shall be able to demonstrate successful completion of at least three (3) similar projects in the last 12 months to be considered qualified to perform this work.

### 2. REQUEST FOR PROPOSALS; OVERVIEW

Notice is hereby given that CILBA is accepting sealed bids for the demolition of the target structures. Bids will be received at:

Village of Ridge Farm  
c/o Jennifer Berck  
15 West Woodyard Avenue  
Ridge Farm, IL 61870

Submission deadline is **June 17, 2024 at 1:00 PM** (local time) at which time they will be publicly opened and read (“**Submission Deadline**”).

Specifications may be obtained at by email to [ewalters@cilba.org](mailto:ewalters@cilba.org) or [mdavis@cilba.org](mailto:mdavis@cilba.org) during regular business hours.

Bids must have the name and address of the bidder and Bid Number 24-12 on the outside of the sealed envelope. No bids will be accepted after the Submission Deadline. Bidders shall comply with the Illinois Prevailing Wage Act and all other Federal, State, and local laws when completing

the Scope of Work. CILBA expressly reserves the right to accept or reject any or all bids. CILBA also reserves the right to re-bid. To be considered, bids must be made in accordance with the instructions set forth in this Request for Proposals.

## 5. DESCRIPTION OF WORK.

CILBA is requesting proposals for pricing and timing of project that includes demolition of all structures; removal of all building materials and debris; and backfill of soils and restoration of soils to ensure appropriate site drainage and not impede future site development of the following Target Structures and all additional work set forth in **Attachment A (“Scope of Work”)**.

- a) 301 N State, Ridge Farm PIN: 33-30-305-011
- b) 300 N State, Ridge Farm PIN: 33-30-304-020
- c) 207 N Harrison, Oakwood PIN: 21-12-402-014
- d) 350 E Franklin St, Paxton PIN: 11-14-17-152-007
- e) 616 N Market St, Paxton PIN: 11-14-08-159-015

Services shall be performed at a standard that meets or exceeds those set forth by the relevant municipal or County codes and permitting requirements. Interested bidders shall be able to demonstrate successful completion of at least three (3) similar projects in the last 12 months to be considered qualified to perform this work.

All properties have received asbestos inspections, sampling, and laboratory analysis. Final reports for each property can be found in **Attachment D (“Hazardous Material Reports”)**. **Asbestos abatement may be necessary for individual Target Structures. Please review the Hazardous Material Reports. Three properties (300 N. State, 207, N. Harrison and 350 E. Franklin) require asbestos abatement.** All waste generated by the demolition will need to be disposed of as asbestos waste at a licensed landfill. The owner and or demolition contractor will need to ensure that all parties involved with the demolition are trained and licensed in handling and disposal of asbestos containing waste. The owner shall take all necessary precautions to protect all persons. **PLEASE NOTE: 207 N Harrison, Oakwood property has an in-ground pool. It must be busted at the foundation so all water can leach and ensure all metal removed. Once foundation of pool and metal removed, backfill and seed area.**

## 6. ADDITIONAL DOCUMENTS

Bidders may obtain all bid documents from CILBA, through the Village of Ridge Farm, at the address listed above.

## 7. QUESTIONS

Bidders may submit questions about the bid documents in writing to CILBA no less than 5 days before the Submission Deadline. Questions received will be compiled and all written replies will be shared with known bidders of record and will become an addendum Request for Proposals. Oral instructions do not form a part of the Request for Proposals. Bidders may check with CILBA within 72 hours prior to the Submission Deadline to confirm any addenda affecting bidding. Please contact [ewalters@cilba.org](mailto:ewalters@cilba.org) or visit the following website: [www.cilba.org](http://www.cilba.org).

## 8. BASIS OF BIDS

Bids shall include all costs to complete the entire Scope of Work set forth in this Request for Proposals. If there are multiple properties, bids shall be listed for each separate property and shall be based on all costs for that property. CILBA may choose to award contracts on each individual property. If there are multiple properties, Bidder does not have to submit bids for all properties and can mark "N/A" on Proposal Form if no Bid is included.

## 9. FORM OF PROPOSAL

Bidders shall submit an exact copy of the "Proposal Form" included in **Attachment B** of this RFP, prepared on the bidder's letterhead. By signing the Proposal Form, the bidder is creating a contractual offer, which includes the following as terms:

- a) Notice to Bidders
- b) Form of Proposal
- c) Sworn Statement Pursuant
- d) General Conditions
- e) Supplemental Conditions
- f) Scope of Work
- g) All Drawings and Specifications
- h) All Attachments, Bonds and Information submitted by the Bidder

The Proposal Form shall be signed and typed below the name of the person authorized to contractually bind the bidder.

If bidder is a corporation, the Proposal Form and related documents must be signed with the legal name of the corporation followed by the state of incorporation and the legal signature of an officer or person authorized to bind the corporation to a contract.

## 10. SUBMITTAL

Submit the following information in a sealed envelope to the address below prior to the Submission Deadline:

- a) Proposal Form
- b) Samples of at least three (3) similar projects in the last 12 months
- c) Sworn Statement, signed and notarized (Attachment)

Failure to submit all required information or documents before the Submission Deadline may result in rejection of the bid. Envelope shall be clearly identified with the project name, the name and address of the bidder and the Bid Number 24-12 on the face of the sealed envelope. **Bids must be received at the Village of Ridge Farm, at the address above, no later than 1pm on June 17, 2024.** Bids will be publicly opened, and no other bids will be accepted.

## 11. WITHDRAWAL

Bids may be withdrawn at any time before the bid opening but may not be resubmitted. CILBA may, at its sole discretion, provide an exception if a bid was turned in prior to issuance of addenda

or other conditions merit consideration. Bids may not be modified after submittal. Bids may not be withdrawn or modified after bid opening unless CILBA has not awarded the Contract within ninety (90) days of the Submission Deadline.

## 12. ACCEPTANCE/REJECTION

CILBA reserves the right to accept or reject any or all bids, waive any technicalities or informalities in the bidding, postpone the bid opening and to reject bids and/or award the Contract as determined to be in CILBA's best interests.

## 13. SUBSTITUTIONS

Bids shall be based upon the information and conditions set forth in this Request for Proposals. Substitute bids may be made only under the following condition: At the time bids are received, Bidders may submit on a separate sheet enclosed with the bid form, a list of proposed substitutions which they are willing to guarantee, stating the additions to or deductions from the bid price in case they are allowed. Technical data and complete descriptions shall be submitted.

## 14. AWARD

After reviewing all bids, CILBA will award the Contract to the lowest responsible bidder, as determined by CILBA. If there are multiple properties, CILBA may award a Contract for each individual property.

### **Generation Conditions**

## 15. COMPLIANCE WITH LAWS

The selected bidder ("**Contractor**") shall perform in compliance with all applicable federal, State and local laws, ordinances, statues, rules and regulations. The Contractor shall be responsible for obtaining any and all necessary permits for a successful, legal demolition.

## 16. CONFLICTS OF INTEREST

Bidders shall provide information regarding any real or potential conflict of interest, including but not limited to business or personal relationships with CILBA's Executive Director or CILBA Board Member or any parent, spouse, child, partner, or employer of the CILBA's Executive Director or Board Members. Failure to reveal any potential conflict of interest at the time of Proposal may represent a breach of contract, subject to appropriate penalties.

## 17. SILENCE OF SPECIFICATIONS

The apparent silence of the specifications as to any detail or apparent omission from it as to a detailed description concerning any point shall be interpreted as meaning that only the best commercial material or practice shall prevail and that only items of the best materials or workmanship are to be used.

## 18. SUPERINTENDENCE

At the inception of the work, the Contractor shall notify CILBA at [ewalters@cilba.org](mailto:ewalters@cilba.org) of the name of its job site agent. The Contractor shall notify CILBA of any change of the job site agent, immediately upon such change. The job site agent shall understand the plans and specifications and have experience managing demolition projects. The job site agent shall have full authority to execute orders or directions of CILBA without delay, and to promptly supply such materials, equipment, tools, labor, and incidentals as may be required.

## 19. TIME

A. **Completion Date.** The Contractor shall complete work on or before the time indicated in the Scope of Work. The contract completion date or period may be extended only by written change order.

### B. Time Extensions

i. Request for Time Extensions. All requests for extension of time to complete work shall be submitted by the Contractor in writing to CILBA at [ewalters@cilba.org](mailto:ewalters@cilba.org). The request shall specify the cause for the delay and the number of additional days sought to complete performance. The request must be submitted within forty-eight (48) hours of the occurrence of the cause of the delay or shall be deemed waived.

In the event of delay due to causes beyond the reasonable control of the Contractor, a reasonable extension of time by the amount of time the Contractor is actually delayed thereby will be given by the way of a properly executed written Change Order. The extension of time granted shall be the exclusive relief provided, and no additional compensation of claim for damages will be paid or due.

ii. Causes Beyond the Reasonable Control of the Contractor. The following are grounds for extensions of time due to causes beyond the reasonable control of the Contractor:

1. Delay in CILBA making the site available or in furnishing items to be furnished by CILBA that are necessary for Contractor to commence or continue work;
2. War, national conflicts, terrorist acts or priorities arising therefrom including restriction of the ability to procure critical materials;
3. Epidemics that affect the Contractors', sub-contractors' or material suppliers' ability to obtain construction labor or labor to produce materials;
4. Strikes or other labor disruptions extending in duration more than five calendar days;
5. Cataclysmic events;

6. Fires on the job site, adjacent to the work site, or involving the Contractors', sub-contractors' or material suppliers' property that materially affects the progress of the work.
7. Material delivery delays when the Contractor has exercised due diligence in securing critical materials.

iii. Liquidated Damages.

1. If the Contractor fails to perform, liquidated damages shall be charged at the rate of \$1,000.00 per calendar day for each day that the work is incomplete. CILBA will deduct these liquidated damages from any monies due or to become due to the Contractor from CILBA.
2. By entering this agreement, the Contractor specifically acknowledges that it is impractical to calculate and prove actual delay costs for failure to complete the contract on time. The amount stated above accounts approximately for administration, engineering, inspection, and supervision costs of delay during periods of delayed performance, as well as damages to the public for inability to use the public improvement.

## 20. METHOD OF PAYMENT

Payment will be made by CILBA after Contractor's complete performance of the Contract in accordance with all provisions thereof and upon subsequent receipt by CILBA of a properly executed invoice together with waivers of liens from all suppliers and subcontractors. Such invoice shall be accompanied by waivers of liens or the equivalent from supplier of work or materials stating that such work or materials have been paid for by the Contractor. Such invoice shall be paid by CILBA within sixty (60) days of its receipt, except for those sums allowed to be withheld pursuant to the Contract.

## 21. RIGHT TO WITHHOLD

In addition to the payments to be retained by CILBA under the other provisions of this contract, CILBA may withhold a sufficient amount of any payment otherwise due to the Contractor to cover the following:

- A. Claims arising in and from the performance of the work on the project under this Contract.
- B. Defective work not remedied.
- C. Failure of the Contractor to make proper payments to its subcontractors and suppliers.

CILBA shall disburse, and shall have the right to act as agent for the Contractor in disbursing, such funds as have been withheld pursuant to this paragraph to the party or parties who are entitled to

payment therefrom (including CILBA). CILBA will render to the Contractor a proper accounting of all such funds disbursed on behalf of the Contractor.

## 22. CHANGE ORDERS AND EXTRA WORK

CILBA's Executive Director may, at any time or from time to time, order additions, deletions or revisions in the Work; these will be authorized by Change Orders. Upon receipt of a Change Order, the Contractor shall proceed with the work involved. All such work shall be executed under the applicable conditions of the Contract. If any Change Order causes an increase or decrease in the Contract Price or an extension or shortening of the Contract time, the increase or decrease must be agreed to by both parties in writing.

## 23. MATERIALS & WORKMANSHIP

- A. Materials & Workmanship Excluded. The demolition and clearance work shall be completed in all respects and all material used in the work and all work thereon shall be done in strict accordance with the specifications set forth herein. All work shall be done in a first-class and workmanlike manner to the satisfaction of CILBA and in accordance with the best practice, standards and standard specifications recognized in the field unless specifically provided for otherwise in the specifications or approved by CILBA in writing.
- B. Final Inspection. When the work of demolition and site clearance is substantially completed, the Contractor shall notify CILBA's Executive Director that the work will be ready for final inspection on a definite date.
- C. Inspections, Correction and Rejection CILBA shall have the right to reject materials and workmanship which are defective or require correction. Rejected workmanship shall be satisfactorily corrected by Contractor and rejected materials shall be removed from the premises both without charge to CILBA. If the Contractor does not correct such defective work and remove rejected materials within a reasonable time, fixed by written notice, CILBA may remove them and charge the expenses to the Contractor.
- D. Inspection after Completion. Should it be considered necessary or advisable by CILBA at any time before acceptance of the work to make an examination of work already completed by disassembling, removing or tearing out same, the Contractor shall on request promptly furnish all necessary facilities, labor and materials for that purpose and the costs thereof shall be charged to the Contractor if the work was covered prior to inspection by CILBA.
- E. No Waiver by Inspection or Payment. Neither the inspection of or payment for any work performed pursuant to any provision in the Contract shall relieve the Contractor of the responsibility for negligence or faulty materials or workmanship to the extent and within the period provided by law or this Contract, whichever is

longer, and upon written notice, the Contractor shall remove any defects due therefrom and correct the same.

#### 24. PROPERTY CONDITIONS

CILBA assumes no responsibility for the condition of existing structures and other property on the subject area nor for their continuance in the condition existing at the time of issuance of the Request for Proposals or thereafter. No adjustment of Contract Price or allowance for any change in conditions or unknown conditions shall be made.

#### 25. INDEMNIFICATION AND HOLD HARMLESS

To the fullest extent allowed by law, Contractor shall indemnify and hold CILBA harmless against any and all damages to property or injuries to or death of any person or persons, including property and employees or agents of CILBA, and shall defend, indemnify and hold CILBA harmless from any and all claims, demands, suits, actions or proceedings of any kind or nature, including Workers Compensation claims, and including the cost of defending such actions including costs and attorneys fees, of or by anyone in any way resulting from or arising out of the operations of the Contractor or the Contractor's employees or subcontractors and acts or omissions of employees or agents of Contractor or subcontractors, unless caused solely by CILBA, its officers or employees. CILBA shall have the right to estimate the amount of such claims, demands, suits, actions or proceedings for damage or injuries and pay the same, and any amounts so paid shall be deducted from the money due the Contractor under this Contract, and the whole or so much of the money due or to become due the Contractor under, as may be considered necessary by CILBA, shall be retained by CILBA until such claims, demands, suits, actions, or proceedings shall have been settled or otherwise disposed of, and satisfactory evidence to that effect furnished to CILBA.

Insurance coverage specified in these General Conditions shall in no way lessen or limit the liability of Contractor under the terms of the contract. Contractor shall procure and maintain at the Contractor's own cost and expense, any additional kinds and amounts of insurance that, in the Contractor's own judgment, may be necessary for the Contractor's proper protection in the prosecution of the work.

#### 26. TERMINATION FOR BREACH

In the event that any of the provisions of this Contract are violated by the Contractor or by any of its subcontractors, CILBA may serve written notice upon the Contractor and the surety, if applicable, of the intention to terminate such Contract, such notice to contain the reasons for such termination intention, and unless within five (5) calendar days after the serving of such notice upon the Contractor such violations shall cease and satisfactory arrangements for correction be made, the Contract shall upon expiration of five (5) calendar days cease and terminate.

#### 27. INSURANCE REQUIRED

Contractor shall provide CILBA with a certificate of insurance showing that the Contractor has policies in effect for the entire duration of the Contract with coverage limits of not less than

\$500,000 Bodily Injury and \$500,000 Property Damage or \$1,000,000 Comprehensive General Liability as well as Automobile and Worker's Compensation coverage. The policies shall name the Central Illinois Land Bank Authority as "Additional Insured" for this Contract.

## 28. SUBCONTRACTORS

- A. No Contractual Relationship. Nothing contained in the contract documents shall create any contractual relationship between any subcontractor and CILBA.
- B. Notice. The Contractor shall notify CILBA in writing of the names of the subcontractors proposed for the principal parts of the Work and shall not employ any subcontractor that CILBA objects to as incompetent or unfit, or that is determined to be legally ineligible to perform work under the Contract.
- C. Responsibility of Contractor. The Contractor agrees to be fully responsible to CILBA for the acts or omissions of each of its subcontractors and of anyone employed directly or indirectly by the Contractor or its subcontractors and this contract obligation shall be in addition to the liability imposed by law upon the Contractor. The Contractor agrees to bind every subcontractor (and every subcontractor of a subcontractor) and every subcontractor agrees to be bound by the terms of this Request for Proposals and the subsequent Contract as far as applicable to its work, unless specifically noted to the contrary in a subcontract approved in writing as adequate by CILBA.

## 29. SOLID WASTE AND HAZARDOUS MATERIALS

Should the Contractor or any of its contractors or subcontractors discover any suspected hazardous materials as defined by State or federal law on the work site, Contractor shall immediately cease work, except as necessary to protect the public's health and safety, and immediately notify the CILBA of its suspicions. The Contractor shall be responsible for proper disposal of all solid waste removed from the work site. The Contractor shall provide CILBA with appropriate documentation of its proper disposal prior to payment for any portion of the work resulting in the disposal of solid waste.

## 30. SANITARY FACILITIES

The Contractor shall furnish, install and maintain sufficient sanitary facilities for the workers, as the need arises.

## 31. VACATING OF BUILDINGS

If the Contractor finds that any structures are not vacated, the Contractor shall immediately notify CILBA's Executive Director and shall not begin demolition or site clearance operations on such properties until so ordered in writing by CILBA, and the Contractor's responsibility for such buildings will not begin until such order from CILBA has been sent to the Contractor. In case such occupancy is of a prolonged nature which actually interferes or is likely to interfere with the

Contractor's operations so as to materially increase the Contractor's costs or require additional time, both parties shall agree to a Change Order or agree to otherwise terminate the Contract.

### 32. ACCIDENT PREVENTION; CONTRACTOR

The Contractor shall exercise all reasonable precaution at all times for the protection of all persons and property and shall be responsible for all damages to persons or property, either on or off the work site, which occur as a result of Contractor's fault or negligence in connection with the performance of the work. Final payment or inspection shall not be deemed a waiver of Contractor's responsibility. The safety provisions of applicable laws and building and construction codes shall be observed. Machinery, equipment and all hazards shall be guarded in accordance with the safety provisions of the "Manual of Accident Prevention in Construction" published by the Associated General Contractors of America, Inc., to the extent that such provisions are not in conflict with applicable local laws.

### 33. DISPUTES

All disputes of claims between the Contractor and CILBA shall come to the attention of CILBA's Executive Director for resolution, including all matters relating to the execution and satisfactory completion of the Work.

### 34. ATTORNEYS FEES

The Contractor shall be responsible for all costs incurred by CILBA to enforce any provision of this contract and/or to remedy any Contractor default or breach of contract, including all court costs and reasonable attorneys fees.

### 35. EMERGENCY SITUATIONS

In an emergency affecting the safety of life or property, on or adjoining the site, the Contractor shall act to prevent such threatened loss or injury.

### 36. AVOIDANCE OF DAMAGE TO PROPERTY OF OTHERS

The Contractor shall avoid damaging sidewalks, streets, curbs, pavements, utilities, structures or any other property. The Contractor shall repair, at the Contractor's own expense and in a manner satisfactory to CILBA and the local jurisdiction any damage thereto caused by the Contractor's operations. The Contractor shall be responsible for locating all utilities on the property and arranging for their disconnection in accordance with all laws and ordinances and utility regulations incurred. Any costs shall be paid by the Contractor.

### 37. PREVAILING WAGES ACT

- A. Illinois Prevailing Wage Act. The Contractor and each of its subcontractors shall comply with the Prevailing Wage Act, 820 ILCS 130/1 et seq., in the matter of prevailing wages. Contractors shall familiarize themselves with all of the

provisions of the Act, and in addition, should make an investigation of the existing labor conditions, and any negotiated labor agreements which may exist or are contemplated at this time. The Contractor should also familiarize themselves with the local jurisdiction's adopted prevailing wage rates, if applicable.

- B. Federal Davis-Bacon Act. To the extent it is applicable, the contractor shall comply with the Federal Davis-Bacon Act rather than the Illinois Prevailing Wage Act referred to above.

### 38. ASSIGNMENT OF CONTRACT

The Contractor shall not assign this Contract or any part hereof without the written consent of the CILBA's Executive Director. No assignment of this Contract shall be valid unless it shall contain a provision that the funds to be paid to the assignee under the assignment are subject to a prior lien for services rendered or materials supplied for the performance of the work called for in said Contract in favor of all persons, firms, or corporations rendering such services or supplying such materials.

### 39. PUBLIC ADVERTISING

The Contractor is specifically denied the right of using in any form or medium CILBA's name for public advertising unless express permission is granted by CILBA's Executive Director.

### 40. RECORD AND AUDITS

The Contractor shall maintain accounts and records, including personnel, property and financial records, adequate to identify and account for all costs pertaining to the Contract and such other records as may be deemed necessary by CILBA to assure proper accounting for all project funds. These records will be made available to CILBA for audit purposes or any authorized representative and will be retained for three (3) years after the expiration of this Contract unless permission to destroy them is granted by CILBA.

### 41. USE OF PREMISES

The Contractor shall confine its equipment, storage of materials, and demolition and site clearance operations to the limits prescribed by local ordinance or relevant permits, or as may be directed by CILBA and shall not unreasonably encumber the premises with its salvaged materials.

### 42. BID-RIGGING, BID-ROTATING PROHIBITED

The Contractor certifies, in accordance with Section 33E-11 of the Illinois Criminal Code, that the Contractor is not barred from bidding on any contract with CILBA as the result of a violation of 720 ILCS 5/33E-3, Bid-Rigging, or 720 ILCS 5/33E-4, Bid Rotating, as amended.

#### 43. PREFERENCE TO VETERANS ACT

The Contractor shall comply with the Veterans Preference Act, 330 ILCS 55/1, as amended, in the employment and appointment to fill positions in the construction, addition to, or alteration of any public works.

#### 44. EMPLOYMENT OF ILLINOIS WORKERS OF PUBLIC WORKS ACT

If at the time this contract is executed, or if during the term of this contract, there is a period of excessive unemployment in Illinois, defined in the Employment of Illinois Workers on Public Works Act, 30 ILCS 570/0.01, as “any month immediately following 2 consecutive months of unemployment in the State of Illinois that has exceeded 5%”, the Contractor agrees to employ Illinois laborers. An “Illinois laborer” is defined as “any person who has resided in Illinois for at least 30 days and intends to become or remain an Illinois resident.” 30 ILCS 570/1(i).

#### 45. TRAFFIC CONTROL

The Contractor shall be responsible for providing adequate safeguards to ensure traffic control and safety at the job site and to meet or exceed minimum standards required by local, State and federal requirements for traffic control. Contractor shall use professional judgement to assess the traffic safety and control measures required by this job and shall describe measures the Contractor will take to ensure traffic safety and control for this job.

#### 46. DELINQUENT TAXES

Pursuant to 65 ILCS 5/11-42.1-1, CILBA may not enter into a Contract for goods and/or services with individuals or entities that are delinquent in the payment of any tax administered by the Illinois Department of Revenue. Before awarding a Contract, CILBA must obtain, under oath from the individuals or entities that no such taxes are delinquent.

#### 47. NON-DISCRIMINATION

Contractor shall not discriminate against any employee or applicant for employment because of race, creed, color, religion, sex, ancestry, and national origin, place of birth, marital status or age.

#### 48. SEXUAL HARASSMENT

Contractor is required to have a sexual harassment policy as part of its company policies. If your policy complies with the elements contained in the sexual harassment guidelines, please submit a copy. If you need to establish a policy, the Contractor have sixty (60) days from the date you submit a bid to establish such policy.

#### 49. SCHEDULES

Contractor shall submit a clear schedule of times for initiation and completion for each segment of the project and shall notify CILBA if deviations occur. Contractor shall submit a schedule of values identifying costs for each segment of the project.

## 50. PROTECTION/REPAIRS/REPLACEMENT

Other than the structures identified for demolition, Contractor shall not damage any building, grounds, pavement or other surfaces or utilities during the construction. All damages shall be repaired in a manner acceptable to CILBA and the municipal jurisdiction at no cost to CILBA or the local jurisdiction. Any and all removing of structures/equipment, relocation of existing equipment or utilities, installation of devices or other temporary measures to aid in the construction shall be repaired and/or replaced by the Contractor in a manner acceptable to CILBA and the local jurisdiction at no additional cost to CILBA and the local jurisdiction.

## 51. SITE COMPLETION

Contractor shall be responsible for returning the site to CILBA in a condition acceptable to the local jurisdiction. This includes but is not limited to; removal of all trash and construction debris, resetting any objects moved to aid in construction and repair/replacement of any and all damages.

## ATTACHMENT A

### SCOPE OF WORK

The Scope of Work for this Request for Proposals shall consist of the demolition of all structures; removal of all building materials and debris; and backfill of soils and restoration of soils to ensure appropriate site drainage and not impede future site development of the following Target Properties:

- a) 301 N State, Ridge Farm PIN: 33-30-305-011
- b) 300 N State, Ridge Farm PIN: 33-30-304-020
- c) 207 N Harrison, Oakwood PIN: 21-12-402-014
- d) 350 E Franklin St, Paxton PIN: 11-14-17-152-007
- e) 616 N Market St, Paxton PIN: 11-14-08-159-015

Work shall be **completed within 35 days** of being awarded the Contract. Services shall be performed at a standard that meets or exceeds those of CILBA and other governing jurisdictions (county, State, federal). In general, demolition and clearing work primarily will consist of disconnection of all utilities, sealing of sewer connections, demolition and disassembly of the project structures, removing concrete slabs, clearing of debris and the filling of all basements with granular fill, placement of top soil, seeding and turf management as specified.

1. The Contractor shall provide all labor, materials, tools, utility costs, equipment and other services and incidentals necessary or convenient for the proper execution and completion of the work and the carrying out of all duties and obligations imposed on the Contractor by this Request for Proposals, with due credit for salvage to be obtained by the Contractor as part of the work except as otherwise specifically excluded by the specifications.
2. The Contractor shall avoid unnecessary interference with the use of streets and alleys by the general public. Contractor shall furnish, install and maintain and operate all means of protection of life and property (of both its employees and the general public) by the use of barricades, signal devices, lights and other equipment as required by IDOT, OSHA and the Illinois Department of Labor. Hard hats, safety glasses and high visibility clothing are required to be worn at all times.
3. The contractor will be responsible for providing and maintaining site security fencing. Condition & Maintenance shall meet or exceed the condition of the fencing upon the contractor's initial arrival for work. Site Security Fencing shall be completely secured each day at end of shift.
4. All construction, demolition and other land disturbing activities must use perimeter silt fence, soil stabilization, stabilized construction entrances and/or other means, as necessary to adequately protect the site from erosion and sediments losses. Details and specifications for erosion control methods may be found in the Illinois Urban Manual. All necessary permits and Stormwater Pollution Prevention Plans must be appropriately acquired by the Contractor.

5. Any work that in any way encumbers public property shall not be commenced until the Contractor has secured a Contractor's Permit, from the local jurisdiction, to close/barricade the streets or sidewalks. Contractor shall also be responsible for all permitting, traffic control and coordination with the local jurisdiction for any and all work that impacts municipal rights of way.
6. Before starting demolition or removal operations, the Contractor shall arrange and confirm the disconnection of all utility service connections such as water, gas, telephone, and electric services to the buildings to be demolished or removed in accordance with the regulations of the utility concerned. Contractor is responsible for adequately protecting any power or other utility lines by the use of protective structures or by demolition procedures that preclude damage to these lines. All liability resulting from disruption and reconnection of any utility line is the responsibility of the Contractor.
7. Sanitary sewers and storm sewers if any, shall be disconnected and permanently sealed off at or near the property line. The Contractor shall accurately establish and stake the location and depth of these sewers. This information shall be transmitted to CILBA and the local jurisdiction for record. The Contractor shall notify the Plumbing Inspector, or designee, for inspection before a sewer is covered up. The Contractor will return the sewer and sanitary notice signed by the Inspector. The Contractor is expected to work with the local jurisdiction to locate the sewer main and building lateral location. Contractor must also work with local jurisdiction to confirm that they are sealed properly prior to demolition.
8. The buildings shall be demolished and removed with minimum disturbance to the general public. The Contractor shall apply a sufficient volume of water on each building in order to remove excessive dust, pollution, or hazard. The Building Inspector or other municipal representative shall have the right to direct the Contractor to spray the building when they feel it necessary for the public good. The Contractor must provide a two (2) inch minimum hose for each building, of such length as required to attach to the nearest hydrant shall be continuously staffed for this purpose. Contractor is responsible for coordination of acquiring sufficient water supply. It is the responsibility of the contractor to comply with the local water system's regulations.
9. After the Contractor is notified to proceed, all material and equipment resulting from the demolition, shall be the property of the Contractor and shall be removed from the premises within fifteen (15) days after the building has been demolished. No materials or equipment shall interfere with or block vehicular or pedestrian traffic.
10. The building(s) (including concrete slabs on grade or otherwise, walls, footings, columns, piers and foundation walls) shall be completely removed. Basement floor areas shall be excavated to granular material and all interior walls and footings shall be completely removed.

11. Should the building contain any hazardous materials, proper mitigation and disposition of the material should be followed as detailed in the Hazardous Materials Report found in the bid attachments.
12. All concrete, asphalt or other hard surfaces, including sidewalks, driveways and parking lots shall be removed with the exception of those within the municipal right of way.
13. All excavated areas shall be backfilled. Backfill shall be deposited at a thickness specified by the local jurisdiction in their relevant ordinances and regulations. No materials resulting from the demolition shall be used as backfill. Backfill materials shall be spread by bulldozers and loaders or approved alternate method and mechanically compacted with the use of a sheep's foot and smooth drum vibratory roller to a compaction acceptable to the local jurisdiction.
14. If any sidewalk, street, alley, right-of-way or other property is damaged during this demolition project, the Contractor shall make any necessary repairs, as required by the local jurisdiction and the cost of repairs shall be incidental to the contract and no additional compensation shall be allowed.
15. With granular fill as specified, the Contractor shall backfill the site using Pit Run or equivalent materials for the fill. Once fill has been completed, a top layer of approved topsoil is required at a depth specified by the local jurisdiction. The site shall be seeded per specifications of the local jurisdiction.
16. The Contractor shall backfill the area of the building and excavations to correspond with existing contours and have positive drainage. The Contractor shall be responsible for correcting any grading which causes ponding of water, within ninety (90) days of project completion. No water shall be directed to adjoining properties.
17. Waste materials shall be legally disposed of at a State of Illinois licensed landfill. The Contractor shall comply with all federal, State and local laws, statutes and ordinances for dumping and shall dispose of all materials in accordance with same. Contractor shall provide the local jurisdiction 24 hours' notice prior to hauling any materials. Contractor must demonstrate compliance with this provision by submitting dumping receipts from such landfill with pay requests. CILBA may refuse project payment for non-compliance.
18. Due to a dumping discount of \$58/ton given to CILBA, this scope of work requires that waste materials for demolitions done in Paxton are taken to **Republic Services location at 16310 E 400 North Rd, Hoopeston, IL, 60942**. For the other 4 demolitions, debris will be taken to **Republic Services location at 601 E Brickyard Rd, Danville, IL 61832**. CILBA will pay this fee directly. Contractor will provide CILBA 24 hours' notice prior to hauling any materials so that CILBA can pay the landfill directly.
19. Contractors are to provide tear down costs per individual property. Additionally, based on estimated tonnage per property, Contractors should provide estimated dumping fees per

property using a \$58/ton tipping fee rate. CILBA has provided a boilerplate spreadsheet to input this information for contractors.

20. All brush and vegetation without foreign materials shall be delivered to a site specified by the local jurisdiction. All materials must be prepared in a manner acceptable to the Site Operations. Generally, that requires no items longer than six (6) feet.
21. CILBA reserves the right to accept or reject any and all bids and to waive any technicalities.
22. Demolition of the above structure(s) shall be completed within forty-five (45) days of receiving a "Notice to Proceed" from CILBA. Any reason for delay of the demolition after "Notice to Proceed" must be reported to and approved by CILBA.
23. A Demolition Permit must be obtained from the local jurisdiction prior to initiation of the demolition project.
24. A Notice of Aware issued to the Contractor shall serve as the official "Notice to Proceed".
25. Any Contractor who initiates but has not completed a demolition project as acceptable by CILBA and the local jurisdiction within the required time frame, shall be assessed a penalty equal to \$1,000 for each working day the project remains incomplete. Extension(s) may only be granted by CILBA under appropriate circumstances at CILBA's sole discretion.
26. Contractor shall exercise all caution and provide all necessary equipment and protective action required to protect all buildings and property adjoining and/or abutting the project site. Any and all damages shall be the responsibility of the Contractor, no additional compensation shall be allowed. The Contractor shall hold harmless and indemnify CILBA and the local jurisdiction for any costs or causes of action associated with, or as a result of this demolition project.
27. Contractor shall be responsible for visiting the job sites and inspecting the areas and conditions under which the work will be performed. No additional compensation shall be allowed for conditions that could have been anticipated.
28. Contractor shall make a diligent effort to separate and sort debris as appropriate to minimize dumping fees. Concrete, Stone, brick and other materials considered clean fill shall be trucked to a site accepting such materials and as approved by the local jurisdiction. Steel and/or other salvage shall be the property of the Contractor.
29. **Remove all fuel tanks from any structures and dispose of them in accordance with Illinois Environmental Protection Agency regulations.**
30. Comply with requirements of authorities and utility service companies relating to:
  - a. Public safety
  - b. Use of public properties
  - c. Pollution and erosion control

- d. Protection of adjacent properties
- e. Abandoned utility lines

**ATTACHMENT B**

**PROPOSAL FORM**

This shall be reproduced on the letterhead of the Bidder exactly as indicated, with all blank spaces correctly filled in with ink or other permanent instrument. No erasures, scratch outs or white outs shall appear on the form submitted.

**BID PROPOSAL #24-12**

To: Central Illinois Land Bank Authority

DATE: \_\_\_\_\_

Having carefully examined the Request for Proposal for Demolition Projects located at:

- a) 301 N State, Ridge Farm PIN: 33-30-305-011
- b) 300 N State, Ridge Farm PIN: 33-30-304-020
- c) 207 N Harrison, Oakwood PIN: 21-12-402-014
- d) 350 E Franklin St, Paxton PIN: 11-14-17-152-007
- e) 616 N Market St, Paxton PIN: 11-14-08-159-015

Illinois including drawings, conditions of the Contract, as well as the site and all conditions affecting the work, we propose to furnish all of the work as shown on the drawings and/or called for in the Request for Proposal as follows:

TOTAL BID: \_\_\_\_\_

COMPLETION DATE: \_\_\_\_\_

In submitting this proposal, we agree:

1. To honor these bids for ninety (90) days following bid opening.
2. To execute and deliver to the CILBA a Contract in accordance with this bid and furnish a certificate of insurance naming the Central Illinois Land Bank Authority "Additional Insured" in effect for the duration of the Contract.
3. To provide a timetable and schedule of values for all work mentioned in the bid.
4. To comply with Prevailing Wage, Equal Opportunity and all other Federal, State and Local laws as they may apply.
5. To comply with all agencies (local, state, and federal) having jurisdiction over this work.

6. That it is CILBA's right to accept or reject any or all bids, to re-bid, to waive technicalities in the bidding, to postpone bid opening and to award the bid as determined to be in the best interest of CILBA.

DATE: \_\_\_\_\_

SIGNED: \_\_\_\_\_

BY: \_\_\_\_\_

COMPANY: \_\_\_\_\_

STATE OF INCORPORATION: \_\_\_\_\_

BUSINESS ADDRESS: \_\_\_\_\_

TELEPHONE: \_\_\_\_\_

**ATTACHMENT C**

**SWORN STATEMENT**

**TO: Central Illinois Land Bank Authority**

With reference to bid # 24-12, the undersigned states under oath as follows: (check only one (1) box).

- The undersigned is not delinquent in the payment of any tax administered by the Illinois Department of Revenue; or,
- The undersigned is delinquent in the payment of one or more taxes administered by the Illinois Department of Revenue, but is contesting its liability for the tax or the amount of tax in accordance with the procedures established by the appropriate revenue Act; or,
- The undersigned is not considered delinquent in the payment of a tax because (i) it has entered into an agreement with the Illinois Department of Revenue for the payment of all such taxes due, and (ii) it is in compliance with the agreement.
- The undersigned has no financial or familial relationship with any CILBA staff member or CILBA Board member and is not aware of any conflict of interest that would prevent CILBA from awarding the Contract to Contractor.

Dated: \_\_\_\_\_, 2024

Bidder:

\_\_\_\_\_  
*Signature*

By: \_\_\_\_\_

SUBSCRIBED AND SWORN TO

Before me this \_\_\_\_\_ day

Of \_\_\_\_\_, 2024

\_\_\_\_\_  
*Notary Public*

**EXECUTE AND RETURN WITH BID**

**ATTACHMENT D**  
**HAZARDOUS SUBSTANCES REPORT**



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

**Quote Number:** 2024-5273

**Date:** May 28, 2024

Sent Via E-Mail: mdavis@cilba.org

To: Central IL Land Bank Authority  
201 N. Vermilion Street, 2<sup>nd</sup> Floor  
Danville IL 61832

Phone: 217-665-8190

ATTN: Mr. Mike Davis

SUBJECT: Removal of Asbestos Containing Material from a Demo House located at 207 N. Harrison Street, Oakwood, IL.

The following quotation is submitted per your request for **removal** of ACM (Asbestos Containing Material) located at above referenced subject.

Following all applicable Federal, State and Local Regulations, Triple A Asbestos Services, Inc., Illinois Licensed Contractor IDPH Number 500-0578, will supply IDPH licensed, skilled workers and supervisor(s), wages, paid at Prevailing Rate of Vermilion County; materials, equipment; provide proper insurances including general liability, asbestos and pollution, workman compensation and auto; proper paperwork; manifest, haul and disposal of waste to an authorized landfill. Upon completion of the project, all paperwork will be forwarded to the owner for permanent record retention.

Owner is responsible to have all moveable items in the work area removed prior to commencement of project. Owner is responsible to provide and cover the cost of water and electrical power for project.

This project is bid under NESHAP (National Emission Standards for Hazardous Air Pollutants) and OSHA Standards, and applicable IDPH (Illinois Department of Public Health) Regulations for Commercial and Public Buildings (non-AHERA –non-school projects).

**SCOPE OF PROJECT:** Triple A Asbestos Services to Demo out Ceramic tile floor to gain access to 99 sq. ft. of Asbestos Linoleum in the Hallway to Bathroom and Bathroom Floors.

Project Cost: \$ 2,750.00

**Quote # 2024-5273**



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

**PO Box 167 Pana, IL 62557**  
**P: 217.562.7002 F: 217.562.2457**  
**admin@tripleaasbestos.com**

In the event Triple A Asbestos Services is awarded this project:

- 1) Work will not commence without a Notice of Award in writing. An individual from the contracting firm must sign and return the Acceptance and Notice to Proceed, as it is required for Triple A Asbestos Services to proceed with the project.

The price quoted is firm for 60 days.

**TERMS OF PAYMENT:** Payment Terms are Net 30 Days upon completion of the Project.

Thank you for the opportunity to quote this project. In the future, if we can be of service, please do not hesitate to contact us.

Respectfully submitted,

**Lee Austif**  
Operations Manager

Attachments: Acceptance and Notice to Proceed  
Asbestos Contractor License  
Proof of General Liability Insurance

**Quote # 2024-5273**



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

**PO Box 167 Pana, IL 62557**  
**P: 217.562.7002 F: 217.562.2457**  
**admin@tripleaasbestos.com**

## ACCEPTANCE AND NOTICE TO PROCEED

The authorized signatory accepts the correlated proposal, authorizes Notice to Proceed and Award with Project, agrees to the terms & conditions, and agrees to payment upon satisfactory completion of the project. Triple A Asbestos Services, Inc. must be provided with the correct information regarding the property and current ownership to ensure that all paperwork is properly completed. This information is required for project notifications, manifests, certificates of insurance, etc. Non-payment will result in a lien to the property and the signatory agrees to be liable for all court costs and attorney fees if any legal action is required by Triple A Asbestos Services, Inc. to procure payment.

Contracted Price: \$ \_\_\_\_\_ PO #: \_\_\_\_\_

Classification of Property – please check:  Commercial  Residential

Property Name: \_\_\_\_\_

Property Address: \_\_\_\_\_

Classification of Payment– please check:  Private  Public Works

Responsible Party Contracting Services – Whom to Invoice:

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Property Owner Information (if different than responsible party):

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Project Contact:

Name: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Printed Name of Authorized Signatory: \_\_\_\_\_ Title: \_\_\_\_\_

Authorized Contracting Signature: \_\_\_\_\_ Date: \_\_\_\_\_

**Quote # 2024-5273**




**TRIPLE A ASBESTOS**  
 FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
 P: 217.562.7002 F: 217.562.2457  
 admin@tripleaasbestos.com

**IDPH Asbestos Contractor License**

**Illinois License #: 500-0578**

**Expires: May 15, 2025**

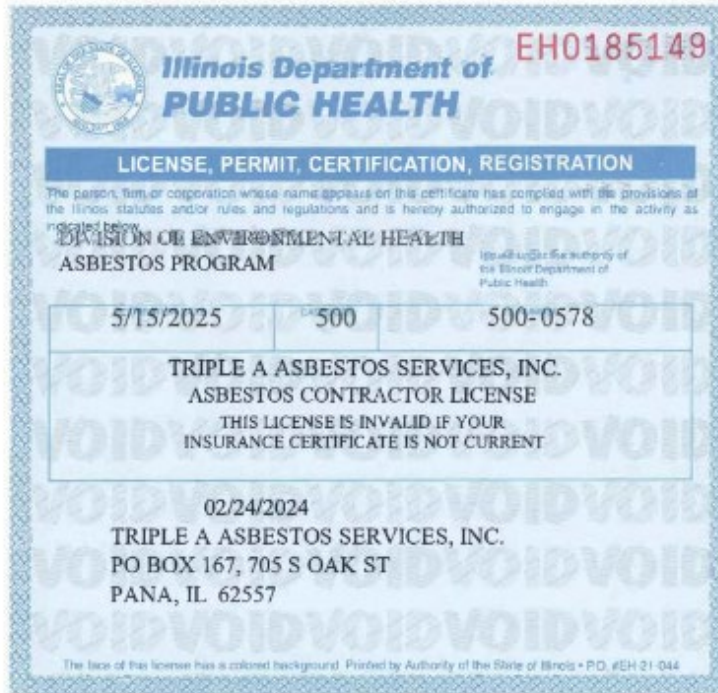

217.562.7002 📞  
 admin@tripleaasbestos.com ✉️  
 www.tripleaasbestos.com 🌐

PO Box 167 Pana, IL 62557 🏠  
 FEIN 37-1388786 #  
 IL Dept. of Human Rights 102577-00 (exp 10/19/27) #



TRIPLE A ASBESTOS
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557
P: 217.562.7002 F: 217.562.2457
admin@tripleasbestos.com



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
01/08/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER LIC #124221 1-866-829-4368
DCW Insurance Agency, Inc.
PO Box 31644
Mesa, AZ 85275-1644
Melanie C. Tyson
CONTACT NAME: Melanie Tyson
PHONE (AC, No, Ext): (866) 829-4368 FAX (AC, No): (866) 829-4369
E-MAIL ADDRESS: mtyson@dcwinsurance.com
INSURER(S) AFFORDING COVERAGE
INSURER A: NADTILOS INS CO NAIC # 17370
INSURER B: KEY RISK INS CO 10885
INSURER C: GREAT DIVIDE INS CO 25224
INSURER D:
INSURER E:
INSURER F:

COVERAGES CERTIFICATE NUMBER: 70390545 REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

Table with columns: INSR LTR, TYPE OF INSURANCE, POLICY NUMBER, POLICY EFF, POLICY EXP, LIMITS. Rows include General Liability, Automobile Liability, Umbrella Liab, and Workers Compensation.

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)
I.D. #0578 / Asbestos Contractors License No. 500-0578
Contractors Pollution Liability provides coverage for asbestos and lead.

CERTIFICATE HOLDER: Illinois Department of Public Health, Division of Environmental Health, Asbestos Division, 525 West Jefferson Street, Springfield, IL 62761-0001, USA
CANCELLATION: SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE: Melanie C. Tyson

ACORD 25 (2010/05) The ACORD name and logo are registered marks of ACORD
mtyson
70390545 © 1988-2010 ACORD CORPORATION. All rights reserved.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

**Quote Number:** 2024-5273

**Date:** May 28, 2024

Sent Via E-Mail: mdavis@cilba.org

To: Central IL Land Bank Authority  
201 N. Vermilion Street, 2<sup>nd</sup> Floor  
Danville IL 61832

Phone: 217-665-8190

ATTN: Mr. Mike Davis

SUBJECT: Removal of Asbestos Containing Material from a Demo House located at 207 N. Harrison Street, Oakwood, IL.

The following quotation is submitted per your request for **removal** of ACM (Asbestos Containing Material) located at above referenced subject.

Following all applicable Federal, State and Local Regulations, Triple A Asbestos Services, Inc., Illinois Licensed Contractor IDPH Number 500-0578, will supply IDPH licensed, skilled workers and supervisor(s), wages, paid at Prevailing Rate of Vermilion County; materials, equipment; provide proper insurances including general liability, asbestos and pollution, workman compensation and auto; proper paperwork; manifest, haul and disposal of waste to an authorized landfill. Upon completion of the project, all paperwork will be forwarded to the owner for permanent record retention.

Owner is responsible to have all moveable items in the work area removed prior to commencement of project. Owner is responsible to provide and cover the cost of water and electrical power for project.

This project is bid under NESHAP (National Emission Standards for Hazardous Air Pollutants) and OSHA Standards, and applicable IDPH (Illinois Department of Public Health) Regulations for Commercial and Public Buildings (non-AHERA –non-school projects).

**SCOPE OF PROJECT:** Triple A Asbestos Services to Demo out Ceramic tile floor to gain access to 99 sq. ft. of Asbestos Linoleum in the Hallway to Bathroom and Bathroom Floors.

Project Cost: \$ 2,750.00

**Quote # 2024-5273**



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

**PO Box 167 Pana, IL 62557**  
**P: 217.562.7002 F: 217.562.2457**  
**admin@tripleaasbestos.com**

In the event Triple A Asbestos Services is awarded this project:

- 1) Work will not commence without a Notice of Award in writing. An individual from the contracting firm must sign and return the Acceptance and Notice to Proceed, as it is required for Triple A Asbestos Services to proceed with the project.

The price quoted is firm for 60 days.

TERMS OF PAYMENT: Payment Terms are Net 30 Days upon completion of the Project.

Thank you for the opportunity to quote this project. In the future, if we can be of service, please do not hesitate to contact us.

Respectfully submitted,

**Lee Austif**  
Operations Manager

Attachments: Acceptance and Notice to Proceed  
Asbestos Contractor License  
Proof of General Liability Insurance

**Quote # 2024-5273**



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

**PO Box 167 Pana, IL 62557**  
**P: 217.562.7002 F: 217.562.2457**  
**admin@tripleaasbestos.com**

## ACCEPTANCE AND NOTICE TO PROCEED

The authorized signatory accepts the correlated proposal, authorizes Notice to Proceed and Award with Project, agrees to the terms & conditions, and agrees to payment upon satisfactory completion of the project. Triple A Asbestos Services, Inc. must be provided with the correct information regarding the property and current ownership to ensure that all paperwork is properly completed. This information is required for project notifications, manifests, certificates of insurance, etc. Non-payment will result in a lien to the property and the signatory agrees to be liable for all court costs and attorney fees if any legal action is required by Triple A Asbestos Services, Inc. to procure payment.

Contracted Price: \$ \_\_\_\_\_ PO #: \_\_\_\_\_

Classification of Property – please check:  Commercial  Residential

Property Name: \_\_\_\_\_

Property Address: \_\_\_\_\_

Classification of Payment– please check:  Private  Public Works

Responsible Party Contracting Services – Whom to Invoice:

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Property Owner Information (if different than responsible party):

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Project Contact:

Name: \_\_\_\_\_

Phone #: \_\_\_\_\_

E-mail: \_\_\_\_\_

Printed Name of Authorized Signatory: \_\_\_\_\_ Title: \_\_\_\_\_

Authorized Contracting Signature: \_\_\_\_\_ Date: \_\_\_\_\_

**Quote # 2024-5273**




**TRIPLE A ASBESTOS**  
 FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
 P: 217.562.7002 F: 217.562.2457  
 admin@tripleaasbestos.com

**IDPH Asbestos Contractor License**

**Illinois License #: 500-0578**

**Expires: May 15, 2025**

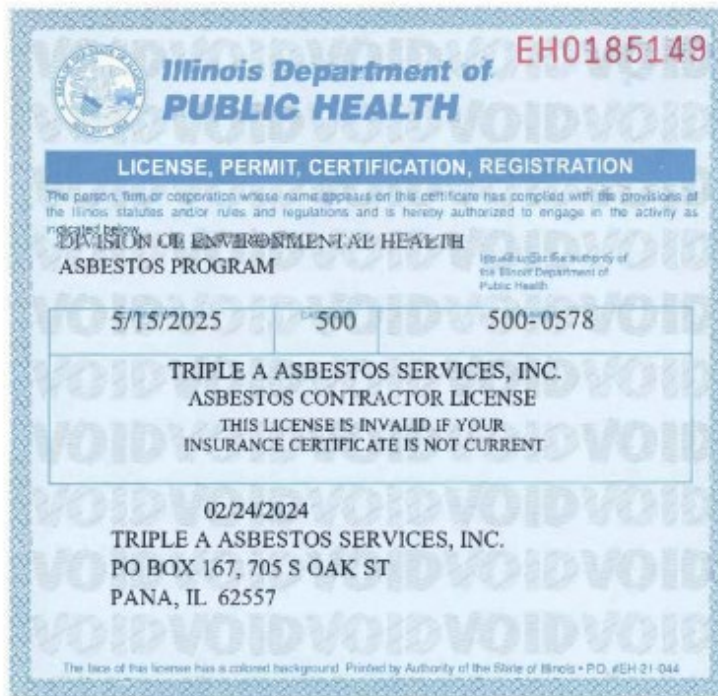

217.562.7002		PO Box 167 Pana, IL 62557	
admin@tripleaasbestos.com		FEIN 37-1388786	#
www.tripleaasbestos.com		IL Dept. of Human Rights 102577-00 (exp 10/19/27)	#



TRIPLE A ASBESTOS
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557
P: 217.562.7002 F: 217.562.2457
admin@tripleasbestos.com



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
01/08/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER LIC #124221 1-866-829-4368
DCW Insurance Agency, Inc.
PO Box 31644
Mesa, AZ 85275-1644
Melanie C. Tyson
CONTACT NAME: Melanie Tyson
PHONE (AC, No, Ext): (866) 829-4368 FAX (AC, No): (866) 829-4369
E-MAIL ADDRESS: mtyson@dcwinsurance.com
INSURER(S) AFFORDING COVERAGE
INSURER A: NADTILOS INS CO 17370
INSURER B: KEY RISK INS CO 10885
INSURER C: GREAT DIVIDE INS CO 25224
INSURER D:
INSURER E:
INSURER F:

COVERAGES CERTIFICATE NUMBER: 70390545 REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

Table with columns: INSR LTR, TYPE OF INSURANCE, POLICY NUMBER, POLICY EFF, POLICY EXP, LIMITS. Rows include General Liability, Automobile Liability, Umbrella Liability, and Workers Compensation.

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)
I.D. #0578 / Asbestos Contractors License No. 500-0578
Contractors Pollution Liability provides coverage for asbestos and lead.

CERTIFICATE HOLDER: Illinois Department of Public Health, Division of Environmental Health, Asbestos Division, 525 West Jefferson Street, Springfield, IL 62761-0001, USA
CANCELLATION: SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE: Melanie C. Tyson

ACORD 25 (2010/05) The ACORD name and logo are registered marks of ACORD
mtyson
70390545 © 1988-2010 ACORD CORPORATION. All rights reserved.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

## **Building Inspection for Asbestos Contained Material (ACM)**

Inspection Requested by: Central IL Land Bank Authority  
201 North Vermilion Street, 2<sup>nd</sup> floor  
Danville, IL 61832

Contact: Mr. Mike Davis  
Cell #: 217-655-8190  
Email: mdavis@cilba.org

Date Inspected: May 21, 2024

Inspection Conducted by: Lee Austif #100-05607  
Triple A Asbestos Services, Inc., Pana, Illinois

Address Location Inspected: Residential House located at 616 North Market, Paxton, IL.

This survey has been written with the understanding that this structure is to be demolished. The demo contractor cannot commence demolition until Friable ACM is removed from structure. The demo contractor or owner is required to file a 10 working day, or 14 calendar days, prior to commencement of demo, Notification form IL 532 1296 with the Illinois Environmental Protection Agency. If filed by the demo contractor, the owner should request a copy and retain on permanent record.

Owner should request copy of Asbestos Abatement Contractor's Illinois Department of Public Health License and proof of proper asbestos insurances.

### **SUMMARY OF INSPECTION**

The structure measures 26' X 28' with vinyl siding over asphalt siding and fiberglass shingled roof and the North and South is wood soffit and fascia and aluminum storm over wood framed windows.

Entry measures 4' X 4' with 12" X 12" vinyl press on floor tile over 12" X 12" vinyl press on floor tile over wood floor and drywall walls and 12" X 12" orange-berg ceiling tiles.

Kitchen measures 12' X 14' with carpet over 9" X 9" floor tile (sample #1) over wood floor and wood paneling over drywall walls and drywall ceiling.

Bathroom measures 5' X 7' with no floor and no ceiling and the South wall is formica and the rest is exposed to the outside.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Hallway measures 3' X 5' with wood floor and wood paneling over drywall walls and 12" X 12" orange-berg ceiling tiles.

Utility room measures 9' X 9' with carpet over wood floor and wood paneling 51" up over drywall (sample #2) walls and 12" X 12" ceiling tiles (sample #3).

Bedroom measures 10' X 12' with carpet over wood floor and wood paneling over drywall walls and 12" X 12" orange-berg ceiling tiles.

Living room measures 12' X 14' with carpet over wood floor and wood paneling 51" up over textured (sample #4) drywall walls and the ceiling is gone.

Four bulk samples taken and a total of six layers analyzed. Attached is a copy of the bulk sample laboratory report.

**\*\*\*** From visual inspection and bulk sample analysis there appears to be no RACM (Regulated Asbestos Containing Materials) that requires removal prior to demolition of the Structure.

NOTE: Illinois State & Federal Laws mandate that transite siding and TSI (thermal stem insulation such as duct tape, pipe insulation, pipe or tank wrap) must be removed by a licensed IDPH Asbestos Contractor.

NOTE: Floor Tile and Linoleum are Category I Non-Friable Resilient Floor Covering. See Paragraph B for regarding handling of this type of Asbestos Containing Building Material during Demolition.

Regulations:

- A. Effective March 22, 1999 per the Illinois COMMERCIAL AND PUBLIC BUILDINGS ACT, and regulations by the Illinois Department of Public Health, prior to renovation or demolition of the structure, all abatement of Thermal System Insulation (TSI) Friable Category I or Transite Category II in a Commercial or Public Building, must be completed by an IDPH LICENSED CONTRACTOR.  
Written Notification is required to IDPH on removal of friable and non-friable 3 square or linear feet to 160 square feet to 260 linear feet. Notification to IEPA (Illinois Environmental Protection Agency) is required on quantities exceeding 160 square 260 linear feet.
- B. DEMOLITION – Non-Friable resilient floor covering (floor Tile) can remain in a demolition project ONLY IF THE MATERIAL REMAINS NON-FRIABLE and can be disposed of as general construction debris. If non-friable is left in a demolition structure, the construction debris cannot be used for "fill" or recycled. If friable, it must be removed by an IDPH licensed contractor.
- C. RENOVATION – If the structure is to be Renovated, the non-friable resilient flooring can be done by either a licensed contractor or if the floor tile can be removed (intact, with minimal breakage) personnel with proper training certificates as specified under OSHA 1926.1101 and 29 CFR 1926, 32(f) and the Illinois Commercial and Public Buildings Act. In either case, applicable notification requirements must be met and all applicable rules and regulations must be followed. If resilient flooring is left in the building, it cannot be made subject to sanding, grinding, cutting, abrading, drilling, chipping, pulverized, or other procedures likely to reduce material to powder or cause asbestos fibers to become airborne. In the event that the material to be removed is friable or becomes friable, it must be removed by a Licensed IDPH Asbestos Contractor.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Disclaimer: This survey is an evaluation of visual inspection only. Any ACM hidden within the structure, or not accessible without damaging the current structure of the building such as inside walls, is not covered by this inspection. Upon renovation or demolition, if suspected ACM is found, work should stop, and IDPH licensed inspector contacted for disposition of suspected materials.

I certify that, to the best of my knowledge, and believe, the reported analysis, opinion, and conclusions were developed, and this report has been prepared, in conformity with the requirements of the ILEPA/USEPA Regulations.

Respectfully submitted,

Lee Austif  
Inspector License #100-05607

Dated: May 24, 2024  
TA PROJECT NUMBER: 9298

Attachments: Inspector Credentials  
Laboratory Report Bulk Samples

**Reference Phone Numbers or Regulatory Agencies:**

IDPH  
Illinois Department of Public Health  
Asbestos Abatement Section  
525 West Jefferson  
Springfield, IL 62761

Phone: 217-782-3517

IEPA  
Illinois Environmental Protection Agency  
PO Box 19276  
1021 N. Grand Avenue East  
Springfield, IL 62794-9276

Phone: 217-785-2011



525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • [www.dph.illinois.gov](http://www.dph.illinois.gov)

**LEE AUSTIF**  
 PO BOX 167, 705 S OAK ST  
 PANA, IL 62557

3/10/2023



ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 05607

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

**COPY OF THE ASBESTOS PROFESSIONAL LICENSE**

Front of License

Back of License

		<b>ASBESTOS          PROFESSIONAL          LICENSE</b>		<b>ENDORSEMENTS</b> SUPERVISOR/WORKER INSPECTOR  PROJECT MANAGER	<b>TC EXPIRES</b> 10/29/2023 9/9/2023  10/29/2023
<b>ID NUMBER</b> 100 - 05607	<b>ISSUED</b> 3/10/2023	<b>EXPIRES</b> 05/15/2024			
<b>LEE AUSTIF</b> PO BOX 167, 705 S OAK ST PANA, IL 62557 Environmental Health		<p><b>Alteration of this license shall result in legal action</b>          This license issued under authority of the State of Illinois          Department of Public Health          This license is valid only when accompanied by a valid          training course certificate.</p>			

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: [dph.illinois.gov/topics-services/environmental-health-protection/asbestos](http://dph.illinois.gov/topics-services/environmental-health-protection/asbestos)

EMAIL Address: [dph.asbestos@illinois.gov](mailto:dph.asbestos@illinois.gov)



2200 Vandalia Street, Collinsville, IL 62234 \* Phone: 618-855-8764

Environmental and Occupational Safety & Health Training

*Does hereby certify*

**Lee Austif**

400 East Main Street, Pana, IL 62557



*Has successfully completed and passed the course examination with at least  
70% for re-accreditation under AHERA (Title II)*

**Asbestos Building Inspector Refresher**

**Class Date:** 09/08/2023  
**Examination Date:** 09/08/2023  
**STC Certificate Number:** STC-20230908-003657ABIR  
**Certification Expiration:** 09/08/2024

David M. Mendoza – President/Training Director  
Certified Environmental Specialist  
OSHA Authorized Instructor

# PAT SERVICES

# // ENGLAND LAB

BOX 2100  
MILTON FL 32583  
217-725-3159 patservices@icloud.com

LAB CERTIFICATION 167489



CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9298

SAMPLING DATE: 5/21/24

PROJECT: RESIDENTIAL HOUSE  
616 N MARKET  
PAXTON IL

SAMPLES RECEIVED: 5/22/24

ANALYTICAL DATE: 5/23/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
KITCHEN							
01A	FLOORTILE	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
01B	TILE UNDERLAYMENT	MASTICBINDER	15	CELLULOSE	85	NONE DETECTED	
UTILITY RM							
02	WALL DRYWALL	GYPSUM/CALCITE	65	CELLULOSE	35	NONE DETECTED	
03	12x12 CEILING TILE	PERLITE	50	CELLULOSE	50	NONE DETECTED	
LIVING RM							
04A	WALL DRYWALL	GYPSUM/CALCITE	65	CELLULOSE	35	NONE DETECTED	
04B	FINISH COAT	GYP/CAL/PERLITE	90	CELLULOSE	10	NONE DETECTED	

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING. PERCENTAGES OF ASBESTOS WHEN PRESENT IN A SAMPLE, ARE VISUAL ESTIMATES BY VOLUME. QUANTITATION IS ACHIEVED BY UTILIZING A STEREO BINOCULAR MICROSCOPE. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F

C MCGINNIS  
STAFF MICROSCOPIST

PG 1 / 1



## TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

### **Building Inspection for Asbestos Contained Material (ACM)**

Inspection Requested by: Central IL Land Bank Authority  
201 North Vermilion Street, 2<sup>nd</sup> floor  
Danville, IL 61832

Contact: Mr. Mike Davis  
Cell #: 217-655-8190  
Email: mdavis@cilba.org

Date Inspected: May 20, 2024

Inspection Conducted by: Lee Austif #100-05607  
Triple A Asbestos Services, Inc., Pana, Illinois

**Address Location Inspected: Residential House with connected Breezeway and connected Garage and a unattached small Shed located at 207 N. Harrison, Oakwood, IL.**

This survey has been written with the understanding that this structure is to be demolished. The demo contractor cannot commence demolition until Friable ACM is removed from structure. The demo contractor or owner is required to file a 10 working day, or 14 calendar days, prior to commencement of demo, Notification form IL 532 1296 with the Illinois Environmental Protection Agency. If filed by the demo contractor, the owner should request a copy and retain on permanent record.

Owner should request copy of Asbestos Abatement Contractor's Illinois Department of Public Health License and proof of proper asbestos insurances.

#### **SUMMARY OF INSPECTION**

The structure measures 28' X 42' with aluminum siding over ship-lap wood siding and a fiberglass shingled roof and aluminum gutter and downspouts a wood soffit and fascia and vinyl clad windows. The attached breezeway measures 8' X 14' with aluminum siding and fiberglass shingled roof and wood framed windows. The attached garage measures 20' X 24' with aluminum siding and fiberglass shingled roof wood framed windows and the South side has one aluminum single car garage door, the interior has a painted concrete floor and exposed wood construction walls and ceiling. The shed measures 10' X 12' with wood exterior and fiberglass shingled roof and the South side has a wood door and the interior has a wood floor and exposed wood construction walls and ceiling. Front porch measures 6' X 20' with concrete floor and four concrete steps and rod iron railing and four rod iron support posts and fiberglass shingled roof and wood ceiling and wood soffit and fascia.



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Living room measures 13' X 19' with hardwood floor and wood paneling over plaster (sample #1) walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling

Hallway measures 4' X 7' with hardwood floor and drywall wall measures 4' X 4' and the rest of the walls are wood paneling and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Kitchen measures 14' X 20' with linoleum (sample #2) over wood floor and wood paneling walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Staircase to breezeway has two concrete steps covered with linoleum (homogeneous to sample #2) to a 3' X 3' landing that has linoleum (homogeneous to sample #2) over concrete floor and wood paneling walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Breezeway measures 8' X 12' with a painted concrete floor and wood walls and 2" X 2' pressboard ceiling tiles.

Breezeway bathroom measures 6' X 8' with 12" X 12" vinyl press on over wood over painted concrete floor and wood paneling on the South wall and the rest of the walls are exposed wood construction and exposed wood construction ceiling.

Front bedroom measures 11' X 13' with hardwood floor and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Hallway to bathroom measures 3' X 13' with 12" X 12" ceramic tile over wood over cement board over linoleum (homogeneous to sample #3) and drywall walls and plaster ceiling.

Bathroom measures 6' X 10' with 12" X 12" ceramic tile over wood over cement board over linoleum (sample #3) and drywall walls and plaster ceiling.

Rear bedroom measures 12' X 16' with hardwood floor and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles over plaster (sample #5) ceiling. Closet/Furnace room measures 4' X 8' with 9" X 9" floor tile (sample #4) over wood floor and drywall walls and plaster ceiling.

Five bulk samples taken and a total of eleven layers analyzed. Attached is a copy of the bulk sample laboratory report.

## POSITIVE

<u>SAMPLE ID</u>	<u>DESCRIPTION</u>	<u>LOCATION</u>	<u>AMOUNT</u>	<u>%ACM</u>
03B	Linoleum	Bathroom	60 sq. ft.	30
Homogeneous	Linoleum	Hallway to Bathroom	39 sq. ft.	30

\*\*\* Sample 03B and Homogeneous Area is Regulated Asbestos Containing Material – Has to be removed prior to Demolition by a Licensed Asbestos Contractor.



## TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

**NOTE: Illinois State & Federal Laws mandate that transite siding and TSI (thermal stem insulation such as duct tape, pipe insulation, pipe or tank wrap) must be removed by a licensed IDPH Asbestos Contractor.**

**NOTE: Floor Tile and Linoleum are Category I Non-Friable Resilient Floor Covering. See Paragraph B for regarding handling of this type of Asbestos Containing Building Material during Demolition.**

### **Regulations:**

- A. Effective March 22, 1999 per the Illinois COMMERCIAL AND PUBLIC BUILDINGS ACT, and regulations by the Illinois Department of Public Health, prior to renovation or demolition of the structure, all abatement of Thermal System Insulation (TSI) Friable Category I or Transite Category II in a Commercial or Public Building, must be completed by an IDPH LICENSED CONTRACTOR. Written Notification is required to IDPH on removal of friable and non-friable 3 square or linear feet to 160 square feet to 260 linear feet. Notification to IEPA (Illinois Environmental Protection Agency) is required on quantities exceeding 160 square 260 linear feet.
- B. **DEMOLITION – Non-Friable resilient floor covering (floor Tile) can remain in a demolition project ONLY IF THE MATERIAL REMAINS NON-FRIABLE and can be disposed of as general construction debris. If non-friable is left in a demolition structure, the construction debris cannot be used for “fill” or recycled. If friable, it must be removed by an IDPH licensed contractor.**
- C. RENOVATION – If the structure is to be Renovated, the non-friable resilient flooring can be done by either a licensed contractor or if the floor tile can be removed (intact, with minimal breakage) personnel with proper training certificates as specified under OSHA 1926.1101 and 29 CFR 1926, 32(f) and the Illinois Commercial and Public Buildings Act. In either case, applicable notification requirements must be met and all applicable rules and regulations must be followed. If resilient flooring is left in the building, it cannot be made subject to sanding, grinding, cutting, abrading, drilling, chipping, pulverized, or other procedures likely to reduce material to powder or cause asbestos fibers to become airborne. In the event that the material to be removed is friable or becomes friable, it must be removed by a Licensed IDPH Asbestos Contractor.

Disclaimer: This survey is an evaluation of visual inspection only. Any ACM hidden within the structure, or not accessible without damaging the current structure of the building such as inside walls, is not covered by this inspection. Upon renovation or demolition, if suspected ACM is found, work should stop, and IDPH licensed inspector contacted for disposition of suspected materials.

I certify that, to the best of my knowledge, and believe, the reported analysis, opinion, and conclusions were developed, and this report has been prepared, in conformity with the requirements of the ILEPA/USEPA Regulations.

Respectfully submitted,

Lee Austif  
Inspector License #100-05607

Dated: May 24, 2024  
TA PROJECT NUMBER: 9289

Attachments: Inspector Credentials  
Laboratory Report Bulk Samples



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

**PO Box 167 Pana, IL 62557**  
**P: 217.562.7002 F: 217.562.2457**  
**admin@tripleaasbestos.com**

**Reference Phone Numbers or Regulatory Agencies:**

IDPH

Illinois Department of Public Health  
Asbestos Abatement Section  
525 West Jefferson  
Springfield, IL 62761

Phone: 217-782-3517

IEPA

Illinois Environmental Protection Agency  
PO Box 19276  
1021 N. Grand Avenue East  
Springfield, IL 62794-9276

Phone: 217-785-2011



525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • [www.dph.illinois.gov](http://www.dph.illinois.gov)

**LEE AUSTIF**  
 PO BOX 167, 705 S OAK ST  
 PANA, IL 62557

3/10/2023



ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 05607

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

**COPY OF THE ASBESTOS PROFESSIONAL LICENSE**

Front of License

Back of License

		<b>ASBESTOS          PROFESSIONAL          LICENSE</b>		<b>ENDORSEMENTS</b> SUPERVISOR/WORKER INSPECTOR  PROJECT MANAGER		<b>TC EXPIRES</b> 10/29/2023 9/9/2023  10/29/2023	
<b>ID NUMBER</b> 100 - 05607	<b>ISSUED</b> 3/10/2023	<b>EXPIRES</b> 05/15/2024			<b>Alteration of this license shall result in legal action</b> This license issued under authority of the State of Illinois Department of Public Health This license is valid only when accompanied by a valid training course certificate.		
<b>LEE AUSTIF</b> PO BOX 167, 705 S OAK ST PANA, IL 62557 Environmental Health							

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: [dph.illinois.gov/topics-services/environmental-health-protection/asbestos](http://dph.illinois.gov/topics-services/environmental-health-protection/asbestos)

EMAIL Address: [dph.asbestos@illinois.gov](mailto:dph.asbestos@illinois.gov)



2200 Vandalia Street, Collinsville, IL 62234 \* Phone: 618-855-8764

Environmental and Occupational Safety & Health Training

*Does hereby certify*

**Lee Austif**

400 East Main Street, Pana, IL 62557



*Has successfully completed and passed the course examination with at least  
70% for re-accreditation under AHERA (Title II)*

**Asbestos Building Inspector Refresher**

**Class Date:** 09/08/2023  
**Examination Date:** 09/08/2023  
**STC Certificate Number:** STC-20230908-003657ABIR  
**Certification Expiration:** 09/08/2024

David M. Mendoza – President/Training Director  
Certified Environmental Specialist  
OSHA Authorized Instructor

# PAT SERVICES

# // ENGLAND LAB

BOX 2100  
MILTON FL 32583  
217-725-3159 patservices@icloud.com

LAB CERTIFICATION 167489



CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9289  
SAMPLING DATE: 5/20/24

PROJECT: RESIDENTIAL HOUSE  
207 N HARRISON  
OAKWOOD IL

SAMPLES RECEIVED: 5/21/24  
ANALYTICAL DATE: 5/22/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
LIVING RM							
01A	WALL PLASTER	GYP/CAL/QTZ	85	CELLULOSE	15	NONE DETECTED	
01B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	
KITCHEN							
02A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
02B	LNLM BACKING	NONE DETECTED		CELL/SYNTH	100	NONE DETECTED	
02C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
BATH							
03A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
03B	LNLM BACKING	NONE DETECTED		CELLULOSE	70	CHRYSTILE	30
03C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
FURNACE CLOSET							
04A	FLOORTILE	VINYLBINDERS	85	CELLULOSE	15	NONE DETECTED	
04B	TILE ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
REAR BEDRM							
05	PLASTER BOARD	GYP/SUM/CALCITE	85	CELLULOSE	15	NONE DETECTED	

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING. PERCENTAGES OF ASBESTOS WHEN PRESENT IN A SAMPLE, ARE VISUAL ESTIMATES BY VOLUME. QUANTITATION IS ACHIEVED BY UTILIZING A STEREO BINOCULAR MICROSCOPE. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F

C MCGINNIS  
STAFF MICROSCOPIST



## TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

### **Building Inspection for Asbestos Contained Material (ACM)**

Inspection Requested by: Central IL Land Bank Authority  
201 North Vermilion Street, 2<sup>nd</sup> floor  
Danville, IL 61832

Contact: Mr. Mike Davis  
Cell #: 217-655-8190  
Email: mdavis@cilba.org

Date Inspected: May 20, 2024

Inspection Conducted by: Lee Austif #100-05607  
Triple A Asbestos Services, Inc., Pana, Illinois

**Address Location Inspected: Residential 2 Story House and Garage located at 300 North State Street, Ridge Farm, IL.**

This survey has been written with the understanding that this structure is to be demolished. The demo contractor cannot commence demolition until Friable ACM is removed from structure. The demo contractor or owner is required to file a 10 working day, or 14 calendar days, prior to commencement of demo, Notification form IL 532 1296 with the Illinois Environmental Protection Agency. If filed by the demo contractor, the owner should request a copy and retain on permanent record.

Owner should request copy of Asbestos Abatement Contractor's Illinois Department of Public Health License and proof of proper asbestos insurances.

#### **SUMMARY OF INSPECTION**

Garage measures 12' X 24' with plywood exterior and a fiberglass shingled roof and the door has been removed and the interior has a dirt floor and exposed wood construction walls and exposed wood rafters.

The house structure approximately measures 38' X 58' with a fiberglass shingled roof and transite (sample #1) over wood ship-lap wood siding and wood framed (sample #2) windows and wood soffit and fascia.

Rear porch measures 7' X 15' with a wood floor and plywood ceiling and ship-lap wood siding on the East wall and the rest of the walls are plywood.

Rear bedroom measures 12' X 14' with 9" X 9" floor tile (sample #4) over wood floor and wood paneling over plaster (sample #5) walls and the ceiling is gone.



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Kitchen measures 12' X 14' with linoleum (sample #3) over wood floor and wood paneling over plaster walls and the ceiling is gone.

Living room measures 16' X 16' with carpet over wood floor and wood paneling over plaster walls and the ceiling is gone.

Bedroom measures 12' X 16' with carpet over wood floor and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Bathroom measures 5' X 9' with linoleum (sample #6) over wood floor and formica over plaster walls and plaster ceiling.

Living room measures 16' X 20' with carpet over wood floor and wood paneling over plaster walls and 2' X 4' orange-berg ceiling tiles over plaster ceiling.

Front porch measures 6' X 16' with 12" X 12" vinyl press on floor tile over wood floor and the North wall is transite (homogeneous to sample #1) and the rest of the walls are plywood and plywood ceiling.

Second floor stairwell has sixteen carpet over wood steps and wood paneling over plaster walls and plaster ceiling.

South bedroom measures 13' X 15' with carpet over wood floor and wood paneling over plaster walls and plaster ceiling.

North bedroom measures 13' X 15' with carpet over wood floor and wood paneling over plaster (sample #7) walls and plaster ceiling.

Seven bulk samples taken and a total of fourteen layers analyzed and one bulk sample point counted. Attached is a copy of the bulk sample laboratory report.

## POSITIVE

<u>SAMPLE ID</u>	<u>DESCRIPTION</u>	<u>LOCATION</u>	<u>AMOUNT</u>	<u>%ACM</u>
01	Transite	Exterior Siding	3,754 sq. ft.	25

\*\*\* Sample 01 is Regulated Asbestos Containing Material – Has to be removed prior to Demolition by a Licensed Asbestos Contractor.

NOTE: Illinois State & Federal Laws mandate that transite siding and TSI (thermal stem insulation such as duct tape, pipe insulation, pipe or tank wrap) must be removed by a licensed IDPH Asbestos Contractor.

**NOTE: Floor Tile and Linoleum are Category I Non-Friable Resilient Floor Covering. See Paragraph B for regarding handling of this type of Asbestos Containing Building Material during Demolition.**



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

## Regulations:

- A.** Effective March 22, 1999 per the Illinois COMMERCIAL AND PUBLIC BUILDINGS ACT, and regulations by the Illinois Department of Public Health, prior to renovation or demolition of the structure, all abatement of Thermal System Insulation (TSI) Friable Category I or Transite Category II in a Commercial or Public Building, must be completed by an IDPH LICENSED CONTRACTOR.  
Written Notification is required to IDPH on removal of friable and non-friable 3 square or linear feet to 160 square feet to 260 linear feet. Notification to IEPA (Illinois Environmental Protection Agency) is required on quantities exceeding 160 square 260 linear feet.
- B.** DEMOLITION – Non-Friable resilient floor covering (floor Tile) can remain in a demolition project ONLY IF THE MATERIAL REMAINS NON-FRIABLE and can be disposed of as general construction debris. If non-friable is left in a demolition structure, the construction debris cannot be used for “fill” or recycled. If friable, it must be removed by an IDPH licensed contractor.
- C.** RENOVATION – If the structure is to be Renovated, the non-friable resilient flooring can be done by either a licensed contractor or if the floor tile can be removed (intact, with minimal breakage) personnel with proper training certificates as specified under OSHA 1926.1101 and 29 CFR 1926, 32(f) and the Illinois Commercial and Public Buildings Act. In either case, applicable notification requirements must be met and all applicable rules and regulations must be followed. If resilient flooring is left in the building, it cannot be made subject to sanding, grinding, cutting, abrading, drilling, chipping, pulverized, or other procedures likely to reduce material to powder or cause asbestos fibers to become airborne. In the event that the material to be removed is friable or becomes friable, it must be removed by a Licensed IDPH Asbestos Contractor.

Disclaimer: This survey is an evaluation of visual inspection only. Any ACM hidden within the structure, or not accessible without damaging the current structure of the building such as inside walls, is not covered by this inspection. Upon renovation or demolition, if suspected ACM is found, work should stop, and IDPH licensed inspector contacted for disposition of suspected materials.

I certify that, to the best of my knowledge, and believe, the reported analysis, opinion, and conclusions were developed, and this report has been prepared, in conformity with the requirements of the ILEPA/USEPA Regulations.

Respectfully submitted,

Lee Austif  
Inspector License #100-05607

Dated: May 24, 2024  
TA PROJECT NUMBER: 9287

Attachments: Inspector Credentials  
Laboratory Report Bulk Samples

## Reference Phone Numbers or Regulatory Agencies:

IDPH  
Illinois Department of Public Health  
Asbestos Abatement Section  
525 West Jefferson  
Springfield, IL 62761  
Phone: 217-782-3517

IEPA  
Illinois Environmental Protection Agency  
PO Box 19276  
1021 N. Grand Avenue East  
Springfield, IL 62794-9276  
Phone: 217-785-2011



525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • [www.dph.illinois.gov](http://www.dph.illinois.gov)

**LEE AUSTIF**  
 PO BOX 167, 705 S OAK ST  
 PANA, IL 62557

3/10/2023



ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 05607

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

**COPY OF THE ASBESTOS PROFESSIONAL LICENSE**

Front of License

Back of License

		<b>ASBESTOS          PROFESSIONAL          LICENSE</b>		<b>ENDORSEMENTS</b> SUPERVISOR/WORKER INSPECTOR  PROJECT MANAGER		<b>TC EXPIRES</b> 10/29/2023 9/9/2023  10/29/2023	
<b>ID NUMBER</b> 100 - 05607	<b>ISSUED</b> 3/10/2023	<b>EXPIRES</b> 05/15/2024			<b>Alteration of this license shall result in legal action</b> This license issued under authority of the State of Illinois Department of Public Health This license is valid only when accompanied by a valid training course certificate.		
<b>LEE AUSTIF</b> PO BOX 167, 705 S OAK ST PANA, IL 62557 Environmental Health							

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: [dph.illinois.gov/topics-services/environmental-health-protection/asbestos](http://dph.illinois.gov/topics-services/environmental-health-protection/asbestos)

EMAIL Address: [dph.asbestos@illinois.gov](mailto:dph.asbestos@illinois.gov)



2200 Vandalia Street, Collinsville, IL 62234 \* Phone: 618-855-8764

Environmental and Occupational Safety & Health Training

*Does hereby certify*

**Lee Austif**

400 East Main Street, Pana, IL 62557



*Has successfully completed and passed the course examination with at least  
70% for re-accreditation under AHERA (Title II)*

**Asbestos Building Inspector Refresher**

**Class Date:** 09/08/2023  
**Examination Date:** 09/08/2023  
**STC Certificate Number:** STC-20230908-003657ABIR  
**Certification Expiration:** 09/08/2024

David M. Mendoza – President/Training Director  
Certified Environmental Specialist  
OSHA Authorized Instructor

# PAT SERVICES

# // ENGLAND LAB

BOX 2100  
MILTON FL 32583  
217-725-3159    patservices@icloud.com

LAB CERTIFICATION 167489



CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9287  
SAMPLING DATE: 5/20/24

PROJECT: RESIDENTIAL HOUSE  
300 N STATE  
RIDGE FARM IL

SAMPLES RECEIVED: 5/21/24  
ANALYTICAL DATE: 5/22/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
<b>EXTERIOR</b>							
<b>SIDING</b>							
01	TRANSITE	GYPSUM/CALCITE	75	NONE DETECTED		CHRYBOTILE	25
<b>WINDOWS</b>							
02	CAULKING	GYP/CAL/LATEX	88	CELL/FBGL	12	PTCT	
<b>INTERIOR</b>							
<b>1<sup>ST</sup> FL</b>							
<b>KITCHEN</b>							
03A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
03B	LNLM BACKING	NONE DETECTED		CELL/SYNTH	100	NONE DETECTED	
03C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
<b>REAR BEDRM</b>							
04A	FLOOR TILE	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
04B	TILE ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
05A	WALL PLASTER	GYP/CAL/QTZ	85	CELLULOSE	15	NONE DETECTED	
05B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	
<b>BATH</b>							
06A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
06B	LNLM BACKING	NONE DETECTED		CELL/SYNTH	100	NONE DETECTED	
06C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
<b>2<sup>ND</sup> FL</b>							
<b>N BEDRM</b>							
07A	WALL PLASTER	GYP/CAL/QTZ	85	CELLULOSE	15	NONE DETECTED	
07B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING. PERCENTAGES OF ASBESTOS WHEN PRESENT IN A SAMPLE, ARE VISUAL ESTIMATES BY VOLUME. QUANTITATION IS ACHIEVED BY UTILIZING A STEREO BINOCULAR MICROSCOPE. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F

C MCGINNIS  
STAFF MICROSCOPIST

# PAT SERVICES

# // ENGLAND LAB

BOX 2100  
MILTON FL 32583  
217-725-3159    patservices@icloud.com

LAB CERTIFICATION 167489



CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9287  
SAMPLING DATE: 5/20/24

PROJECT: RESIDENTIAL HOUSE  
300 N STATE  
RIDGE FARM IL

SAMPLES RECEIVED: 5/21/24  
ANALYTICAL DATE: 5/22/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
---------	----------------------	----------------------	---	------------------	---	----------	---

EXTERIOR

WINDOWS

02	CAULKING	GYP/CAL/LATEX	88	CELL/FBGL	12	NONE DETECTED	
----	----------	---------------	----	-----------	----	---------------	--

POINT COUNT ANALYSIS:  
8 SLIDES COUNTED  
50 NON-EMPTY POINTS EACH SLIDE  
400 POINTS TOTAL

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING EPA METHOD 600/R-93-116, JULY 1993. THE CLARIFICATION OF NESHAP RULES FOR ASBESTOS 1994 40 CFR 61, SUBPART M, RECOMMENDS RACM TO BE POINT COUNTED. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH 1 PART 763, APPENDIX A TO SUBPARTS C,F

C MCGINNIS  
STAFF MICROSCOPIST



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

## Building Inspection for Asbestos Contained Material (ACM)

Inspection Requested by: Central IL Land Bank Authority  
201 North Vermilion Street, 2<sup>nd</sup> floor  
Danville, IL 61832

Contact: Mr. Mike Davis  
Cell #: 217-655-8190  
Email: mdavis@cilba.org

Date Inspected: May 20, 2024

Inspection Conducted by: Lee Austif #100-05607  
Triple A Asbestos Services, Inc., Pana, Illinois

Address Location Inspected: Residential House located at 301 North State Street, Ridge Farm, IL.

This survey has been written with the understanding that this structure is to be demolished. The demo contractor cannot commence demolition until Friable ACM is removed from structure. The demo contractor or owner is required to file a 10 working day, or 14 calendar days, prior to commencement of demo, Notification form IL 532 1296 with the Illinois Environmental Protection Agency. If filed by the demo contractor, the owner should request a copy and retain on permanent record.

Owner should request copy of Asbestos Abatement Contractor's Illinois Department of Public Health License and proof of proper asbestos insurances.

### SUMMARY OF INSPECTION

The structure measures 32' X 46' with a fiberglass shingled roof and asphalt siding and wood framed windows (sample #1) and wood soffit and fascia. The rear porch measures 6' X 14' with two concrete steps and four wood support posts and wood floor and exposed wood construction ceiling and a fiberglass shingled roof. The front porch measures 6' X 14' with two concrete steps and two wood support posts and wood floor and exposed wood construction ceiling and a fiberglass shingled roof.

Living room measures 15' X 16' with wood floor and wood paneling over plaster walls and 12" X 123" orange-berg ceiling tiles.

Kitchen measures 15' X 15' with linoleum (sample #2) over 9" X 9" floor (sample #3) over wood floor and wood paneling walls over plaster walls and 12" X 12" orange-berg ceiling tiles.

Middle bedroom measures 9' X 15' with wood floor and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Bathroom measures 5' X 7' with carpet over wood floor and wood paneling 55" up over drywall (sample #4) walls and 12" X 12" orange-berg ceiling tiles.

Front bedroom measures 13' X 15' with wood floor and wood paneling over plaster walls and 2' X 4' fiberglass ceiling tiles.

Bedroom measures 9' X 11' with wood floor and wood paneling over plaster walls and 2' X 2' orange-berg ceiling tiles.

Closet measures 3' X 8' with 9" X 9" floor tile (homogeneous to sample #3) over wood floor and plaster walls and 12" X 12" orange-berg ceiling tiles.

Four bulk samples taken and a total of nine layers analyzed and one bulk sample point counted. Attached is a copy of the bulk sample laboratory report.

**\*\*\*** From visual inspection and bulk sample analysis there appears to be no RACM (Regulated Asbestos Containing Materials) that requires removal prior to demolition of the Structure.

**NOTE: Illinois State & Federal Laws mandate that transite siding and TSI (thermal stem insulation such as duct tape, pipe insulation, pipe or tank wrap) must be removed by a licensed IDPH Asbestos Contractor.**

**NOTE: Floor Tile and Linoleum are Category I Non-Friable Resilient Floor Covering. See Paragraph B for regarding handling of this type of Asbestos Containing Building Material during Demolition.**

**Regulations:**

- A. Effective March 22, 1999 per the Illinois COMMERCIAL AND PUBLIC BUILDINGS ACT, and regulations by the Illinois Department of Public Health, prior to renovation or demolition of the structure, all abatement of Thermal System Insulation (TSI) Friable Category I or Transite Category II in a Commercial or Public Building, must be completed by an IDPH LICENSED CONTRACTOR.  
Written Notification is required to IDPH on removal of friable and non-friable 3 square or linear feet to 160 square feet to 260 linear feet. Notification to IEPA (Illinois Environmental Protection Agency) is required on quantities exceeding 160 square 260 linear feet.
- B. DEMOLITION – Non-Friable resilient floor covering (floor Tile) can remain in a demolition project ONLY IF THE MATERIAL REMAINS NON-FRIABLE and can be disposed of as general construction debris. If non-friable is left in a demolition structure, the construction debris cannot be used for "fill" or recycled. If friable, it must be removed by an IDPH licensed contractor.
- C. RENOVATION – If the structure is to be Renovated, the non-friable resilient flooring can be done by either a licensed contractor or if the floor tile can be removed (intact, with minimal breakage) personnel with proper training certificates as specified under OSHA 1926.1101 and 29 CFR 1926, 32(f) and the Illinois Commercial and Public Buildings Act. In either case, applicable notification requirements must be met and all applicable rules and regulations must be followed. If resilient flooring is left in the building, it cannot be made subject to sanding, grinding, cutting, abrading, drilling, chipping, pulverized, or other procedures likely to reduce material to powder or cause asbestos fibers to become airborne. In the event that the material to be removed is friable or becomes friable, it must be removed by a Licensed IDPH Asbestos Contractor.



**TRIPLE A ASBESTOS**  
FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Disclaimer: This survey is an evaluation of visual inspection only. Any ACM hidden within the structure, or not accessible without damaging the current structure of the building such as inside walls, is not covered by this inspection. Upon renovation or demolition, if suspected ACM is found, work should stop, and IDPH licensed inspector contacted for disposition of suspected materials.

I certify that, to the best of my knowledge, and believe, the reported analysis, opinion, and conclusions were developed, and this report has been prepared, in conformity with the requirements of the ILEPA/USEPA Regulations.

Respectfully submitted,

Lee Austif  
Inspector License #100-05607

Dated: May 24, 2024  
TA PROJECT NUMBER: 9288

Attachments: Inspector Credentials  
Laboratory Report Bulk Samples

**Reference Phone Numbers or Regulatory Agencies:**

IDPH  
Illinois Department of Public Health  
Asbestos Abatement Section  
525 West Jefferson  
Springfield, IL 62761

Phone: 217-782-3517

IEPA  
Illinois Environmental Protection Agency  
PO Box 19276  
1021 N. Grand Avenue East  
Springfield, IL 62794-9276

Phone: 217-785-2011



525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • [www.dph.illinois.gov](http://www.dph.illinois.gov)

**LEE AUSTIF**  
 PO BOX 167, 705 S OAK ST  
 PANA, IL 62557

3/10/2023



ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 05607

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

**COPY OF THE ASBESTOS PROFESSIONAL LICENSE**

Front of License

Back of License

		<b>ASBESTOS          PROFESSIONAL          LICENSE</b>		<b>ENDORSEMENTS</b> SUPERVISOR/WORKER INSPECTOR  PROJECT MANAGER	<b>TC EXPIRES</b> 10/29/2023 9/9/2023  10/29/2023
<b>ID NUMBER</b> 100 - 05607	<b>ISSUED</b> 3/10/2023	<b>EXPIRES</b> 05/15/2024			
<b>LEE AUSTIF</b> PO BOX 167, 705 S OAK ST PANA, IL 62557 Environmental Health					
			<b>Alteration of this license shall result in legal action</b> This license issued under authority of the State of Illinois Department of Public Health This license is valid only when accompanied by a valid training course certificate.		

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: [dph.illinois.gov/topics-services/environmental-health-protection/asbestos](http://dph.illinois.gov/topics-services/environmental-health-protection/asbestos)  
 EMAIL Address: [dph.asbestos@illinois.gov](mailto:dph.asbestos@illinois.gov)



2200 Vandalia Street, Collinsville, IL 62234 \* Phone: 618-855-8764

Environmental and Occupational Safety & Health Training

*Does hereby certify*

**Lee Austif**

400 East Main Street, Pana, IL 62557



*Has successfully completed and passed the course examination with at least  
70% for re-accreditation under AHERA (Title II)*

**Asbestos Building Inspector Refresher**

**Class Date:** 09/08/2023  
**Examination Date:** 09/08/2023  
**STC Certificate Number:** STC-20230908-003657ABIR  
**Certification Expiration:** 09/08/2024

David M. Mendoza – President/Training Director  
Certified Environmental Specialist  
OSHA Authorized Instructor

# PAT SERVICES

# // ENGLAND LAB

BOX 2100  
MILTON FL 32583  
217-725-3159 patservices@icloud.com

LAB CERTIFICATION 167489



CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9288

SAMPLING DATE: 5/20/24

PROJECT: RESIDENTIAL HOUSE  
301 N STATE  
RIDGE FARM IL

SAMPLES RECEIVED: 5/21/24

ANALYTICAL DATE: 5/22/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
EXTERIOR							
01	WINDOWS CAULKING	GYP/CAL/LATEX	96	CELLULOSE	4	NONE DETECTED	

POINT COUNT ANALYSIS:  
8 SLIDES COUNTED  
50 NON-EMPTY POINTS EACH SLIDE  
400 POINTS TOTAL

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING EPA METHOD 600/R93-116, JULY 1993. THE CLARIFICATION OF NESHAP RULES FOR ASBESTOS 1994 40 CFR 61, SUBPART M, RECOMMENDS RACM TO BE POINT COUNTED. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F

C MCGINNIS  
STAFF MICROSCOPIST

# PAT SERVICES

# // ENGLAND LAB



BOX 2100  
MILTON FL 32583  
217-725-3159 patservices@icloud.com

LAB CERTIFICATION 167489

CLIENT: TRIPLE A ASBESTOS SERVICES  
PO BOX 607  
PANA IL 62536

PROJECT NO: 9288  
SAMPLING DATE: 5/20/24

PROJECT: RESIDENTIAL HOUSE  
301 N STATE  
RIDGE FARM IL

SAMPLES RECEIVED: 5/21/24  
ANALYTICAL DATE: 5/22/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
EXTERIOR							
WINDOWS							
01	CAULKING	GYP/CAL/LATEX	96	CELLULOSE	4	PTCT	
INTERIOR							
KITCHEN							
02A	LINOLEUM TOP LAYER	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
02B	LNLM BACKING	NONE DETECTED		CELLULOSE	100	NONE DETECTED	
02C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
03A	FLOORTILE BTM LAYER	VINYLBINDERS	80	CELLULOSE	20	NONE DETECTED	
03B	TILE UNDERLAYMENT	MASTICBINDER	15	CELLULOSE	85	NONE DETECTED	
BATH							
04	WALL DRYWALL	GYPSUM/CALCITE	70	CELLULOSE	30	NONE DETECTED	
CLOSET							
05A	WALL PLASTER	GYP/CAL/QTZ	85	CELLULOSE	15	NONE DETECTED	
05B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING. PERCENTAGES OF ASBESTOS WHEN PRESENT IN A SAMPLE, ARE VISUAL ESTIMATES BY VOLUME. QUANTITATION IS ACHIEVED BY UTILIZING A STEREO BINOCULAR MICROSCOPE. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F

C.MCGINNIS  
STAFF MICROSCOPIST



## TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

### **Building Inspection for Asbestos Contained Material (ACM)**

Inspection Requested by: Central IL Land Bank Authority  
201 North Vermilion Street, 2<sup>nd</sup> floor  
Danville, IL 61832

Contact: Mr. Mike Davis  
Cell #: 217-655-8190  
Email: mdavis@cilba.org

Date Inspected: May 21, 2024

Inspection Conducted by: Lee Austif #100-05607  
Triple A Asbestos Services, Inc., Pana, Illinois

**Address Location Inspected: Residential 2 Story House located at 350 East Franklin, Paxton, IL.**

This survey has been written with the understanding that this structure is to be demolished. The demo contractor cannot commence demolition until Friable ACM is removed from structure. The demo contractor or owner is required to file a 10 working day, or 14 calendar days, prior to commencement of demo, Notification form IL 532 1296 with the Illinois Environmental Protection Agency. If filed by the demo contractor, the owner should request a copy and retain on permanent record.

Owner should request copy of Asbestos Abatement Contractor's Illinois Department of Public Health License and proof of proper asbestos insurances.

#### **SUMMARY OF INSPECTION**

The structure approximately measures 20' X 48' with a fiberglass shingled roof and transite (sample #1) siding and the side porch has wood siding and vinyl siding over transite (homogeneous to sample #1) siding and a fiberglass shingled roof and vinyl clad windows and aluminum storm over wood framed windows and wood soffit and fascia and a painted brick foundation.

Rear entry measures 3' X 4' with 12" X 12" vinyl press on floor tile over wood floor and wood paneling walls over plaster walls and plaster ceiling and a 2' X 3' landing covered with linoleum (homogeneous to sample #2) and three wood steps covered with linoleum (sample #2).

Kitchen measures 14' X 14' with linoleum (sample #3) over wood over linoleum (sample #4) over wood floor and wood paneling on the East and North walls and exposed construction on the South and West walls and plaster (sample #5) ceiling.



## TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Dining room measures 13' X 13' with carpet over wood floor and plaster (sample #6) walls and 12" X 12" ceiling tiles (sample #7) over plaster ceiling.

Living room measures 13' X 14' with carpet over wood floor and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles over plaster ceiling.

Bedroom measures 11' X 13' with carpet over wood floor and wood paneling over plaster on the East and South walls and plaster on the North and West walls and plaster ceiling.

Bathroom measures 3' X 4' with linoleum (sample #8) over wood floor and formica walls and 2' X 4' ceiling tiles.

Entry to stairwell measures 3' X 6' with 12" X 12" vinyl press on floor tile over wood floor and wood paneling over plaster walls and plaster ceiling

Second floor stairwell has thirteen carpet over wood steps and wood paneling over plaster walls and 12" X 12" orange-berg ceiling tiles.

Second floor entry to bedrooms measures 10' X 12' with 12" X 12" vinyl press on floor tile over wood floor and wood paneling over plaster walls and 12" X 12" ceiling tiles (sample #9).

Northwest bedroom measures 11' X 12' with 12" X 12" vinyl press on floor tile over wood floor and wood paneling over plaster (sample #10) walls and 12" X 12" orange-berg ceiling tiles.

Northeast bedroom measures 8' X 14' with carpet over wood floor and wood paneling over plaster walls and plaster (sample #11) ceiling.

North bedroom measures 8' X 14' with carpet over wood floor and wood paneling over plaster walls and plaster ceiling.

Bathroom measures 6' X 9' with linoleum (sample #12) over wood floor and wood paneling over plaster walls and ceiling.

Basement has four concrete steps to full basement with a concrete floor and concrete walls and exposed wood construction ceiling and duct tape (sample #13) on the duct work.

Thirteen bulk samples taken and a total of twenty-four layers analyzed. Attached is a copy of the bulk sample laboratory report.



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

<u>POSITIVE SAMPLE ID</u>	<u>DESCRIPTION</u>	<u>LOCATION</u>	<u>AMOUNT</u>	<u>%ACM</u>
01	Transite	Exterior Siding	2,880 sq. ft.	35
02B	Linoleum	Rear Steps to Kitchen	9 sq. ft.	25
13	Duct Tape	Basement	6 sq. ft.	70

**\*\*\*** Samples 01, 02B and 13 is Regulated Asbestos Containing Material – Has to be removed prior to Demolition by a Licensed Asbestos Contractor.

**NOTE: Illinois State & Federal Laws mandate that transite siding and TSI (thermal stem insulation such as duct tape, pipe insulation, pipe or tank wrap) must be removed by a licensed IDPH Asbestos Contractor.**

**NOTE: Floor Tile and Linoleum are Category I Non-Friable Resilient Floor Covering. See Paragraph B for regarding handling of this type of Asbestos Containing Building Material during Demolition.**

#### **Regulations:**

- A. Effective March 22, 1999 per the Illinois COMMERCIAL AND PUBLIC BUILDINGS ACT, and regulations by the Illinois Department of Public Health, prior to renovation or demolition of the structure, all abatement of Thermal System Insulation (TSI) Friable Category I or Transite Category II in a Commercial or Public Building, must be completed by an IDPH LICENSED CONTRACTOR.  
Written Notification is required to IDPH on removal of friable and non-friable 3 square or linear feet to 160 square feet to 260 linear feet. Notification to IEPA (Illinois Environmental Protection Agency) is required on quantities exceeding 160 square 260 linear feet.
- B. **DEMOLITION – Non-Friable resilient floor covering (floor Tile) can remain in a demolition project ONLY IF THE MATERIAL REMAINS NON-FRIABLE and can be disposed of as general construction debris. If non-friable is left in a demolition structure, the construction debris cannot be used for “fill” or recycled. If friable, it must be removed by an IDPH licensed contractor.**
- C. RENOVATION – If the structure is to be Renovated, the non-friable resilient flooring can be done by either a licensed contractor or if the floor tile can be removed (intact, with minimal breakage) personnel with proper training certificates as specified under OSHA 1926.1101 and 29 CFR 1926, 32(f) and the Illinois Commercial and Public Buildings Act. In either case, applicable notification requirements must be met and all applicable rules and regulations must be followed. If resilient flooring is left in the building, it cannot be made subject to sanding, grinding, cutting, abrading, drilling, chipping, pulverized, or other procedures likely to reduce material to powder or cause asbestos fibers to become airborne. In the event that the material to be removed is friable or becomes friable, it must be removed by a Licensed IDPH Asbestos Contractor.

Disclaimer: This survey is an evaluation of visual inspection only. Any ACM hidden within the structure, or not accessible without damaging the current structure of the building such as inside walls, is not covered by this inspection. Upon renovation or demolition, if suspected ACM is found, work should stop, and IDPH licensed inspector contacted for disposition of suspected materials.

I certify that, to the best of my knowledge, and believe, the reported analysis, opinion, and conclusions were developed, and this report has been prepared, in conformity with the requirements of the ILEPA/USEPA Regulations.



# TRIPLE A ASBESTOS

FAMILY OWNED & OPERATED SINCE 1999

PO Box 167 Pana, IL 62557  
P: 217.562.7002 F: 217.562.2457  
admin@tripleaasbestos.com

Respectfully submitted,

Lee Austif  
Inspector License #100-05607

Dated: May 24, 2024  
TA PROJECT NUMBER: 9290

Attachments: Inspector Credentials  
Laboratory Report Bulk Samples

**Reference Phone Numbers or Regulatory Agencies:**

IDPH  
Illinois Department of Public Health  
Asbestos Abatement Section  
525 West Jefferson  
Springfield, IL 62761

Phone: 217-782-3517

IEPA  
Illinois Environmental Protection Agency  
PO Box 19276  
1021 N. Grand Avenue East  
Springfield, IL 62794-9276

Phone: 217-785-2011



525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • [www.dph.illinois.gov](http://www.dph.illinois.gov)

**LEE AUSTIF**  
 PO BOX 167, 705 S OAK ST  
 PANA, IL 62557

3/10/2023

ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 05607

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

**COPY OF THE ASBESTOS PROFESSIONAL LICENSE**

Front of License

Back of License

		<b>ASBESTOS          PROFESSIONAL          LICENSE</b>		<b>ENDORSEMENTS</b> SUPERVISOR/WORKER INSPECTOR  PROJECT MANAGER	<b>TC EXPIRES</b> 10/29/2023 9/9/2023  10/29/2023
<b>ID NUMBER</b> 100 - 05607	<b>ISSUED</b> 3/10/2023	<b>EXPIRES</b> 05/15/2024			
<b>LEE AUSTIF</b> PO BOX 167, 705 S OAK ST PANA, IL 62557 Environmental Health					
			<b>Alteration of this license shall result in legal action</b> This license issued under authority of the State of Illinois Department of Public Health This license is valid only when accompanied by a valid training course certificate.		

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: [dph.illinois.gov/topics-services/environmental-health-protection/asbestos](http://dph.illinois.gov/topics-services/environmental-health-protection/asbestos)

EMAIL Address: [dph.asbestos@illinois.gov](mailto:dph.asbestos@illinois.gov)



2200 Vandalia Street, Collinsville, IL 62234 \* Phone: 618-855-8764

Environmental and Occupational Safety & Health Training

*Does hereby certify*

**Lee Austif**

400 East Main Street, Pana, IL 62557



*Has successfully completed and passed the course examination with at least  
70% for re-accreditation under AHERA (Title II)*

**Asbestos Building Inspector Refresher**

**Class Date:** 09/08/2023  
**Examination Date:** 09/08/2023  
**STC Certificate Number:** STC-20230908-003657ABIR  
**Certification Expiration:** 09/08/2024

David M. Mendoza – President/Training Director  
Certified Environmental Specialist  
OSHA Authorized Instructor

**BOX 2100**  
**MILTON FL 32583**  
**217-725-3159**      patservices@icloud.com

LAB CERTIFICATION 167489



**CLIENT:** TRIPLE A ASBESTOS SERVICES  
 PO BOX 607  
 PANA IL 62536

**PROJECT NO:** 9290  
**SAMPLING DATE:** 5/21/24

**PROJECT:** RESIDENTIAL HOUSE  
 350 E FRANKLIN  
 PAXTON IL

**SAMPLES RECEIVED:** 5/22/24  
**ANALYTICAL DATE:** 5/23/24

## LABORATORY ANALYSIS POLARIZED LIGHT MICROSCOPY METHODOLOGY EPA 600

SAMPLE#	LOCATION DESCRIPTION	NON-FIBROUS MATERIAL	%	FIBROUS MATERIAL	%	ASBESTOS	%
<b>EXTERIOR SIDING</b>							
01	TRANSITE	GYPSUM/CALCITE	65	NONE DETECTED		CHRYSOTILE	35
<b>INTERIOR 1<sup>ST</sup> FL</b>							
<b>KITCHEN REAR STEPS</b>							
02A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
02B	LNLM BACKING	NONE DETECTED		CELLULOSE	75	CHRYSOTILE	25
<b>KITCHEN</b>							
03A	LINOLEUM TOP LAYER	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
03B	LNLM UNDERLAYMENT	NONE DETECTED		CELLULOSE	100	NONE DETECTED	
03C	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
04A	LINOLEUM BTM LAYER	VINYLBINDER	80	CELLULOSE	20	NONE DETECTED	
04B	LNLM UNDERLAYMENT	MASTICBINDER	15	CELLULOSE	85	NONE DETECTED	
05A	CEILING PLASTER	GYPSUM/CALCITE	85	CELLULOSE	15	NONE DETECTED	
05B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	
<b>DINING RM</b>							
06A	WALL PLASTER	GYPSUM/CALCITE	85	CELLULOSE	15	NONE DETECTED	
06B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	
07	12x12 CEILING TILE	PERLITE	50	CELLULOSE	50	NONE DETECTED	
<b>BATH</b>							
08A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
08B	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
08C	LNLM UNDERLAYMENT	NONE DETECTED		CELLULOSE	100	NONE DETECTED	
<b>2<sup>ND</sup> FL</b>							
<b>BEDRM ENTRY</b>							
09	12x12 CEILING TILE	PERLITE	50	CELLULOSE	50	NONE DETECTED	
<b>NW BEDRM</b>							
10	WALL PLASTER	GYP/CAL/QTZ	85	CELLULOSE	15	NONE DETECTED	
<b>NE BEDRM</b>							
11A	CEILING PLASTER	GYPSUM/CALCITE	85	CELLULOSE	15	NONE DETECTED	
11B	PLASTER FINISH COAT	GYP/CAL/SILICA	90	CELLULOSE	10	NONE DETECTED	
<b>BATH</b>							
12A	LINOLEUM	POLYVINYL	100	NONE DETECTED		NONE DETECTED	
12B	LNLM ADHESIVE	LATEXBINDER	80	CELLULOSE	20	NONE DETECTED	
12C	LNLM UNDERLAYMENT	NONE DETECTED		CELLULOSE	100	NONE DETECTED	
<b>BASEMENT</b>							
13	DUCT INSLTN TAPE	NONE DETECTED		CELLULOSE	30	CHRYSOTILE	70

ALL SAMPLES ANALYZED BY POLARIZED LIGHT MICROSCOPY WITH DISPERSION STAINING. PERCENTAGES OF ASBESTOS WHEN PRESENT IN A SAMPLE, ARE VISUAL ESTIMATES BY VOLUME. QUANTITATION IS ACHIEVED BY UTILIZING A STEREO BINOCULAR MICROSCOPE. PAT SERVICES MAINTAINS LIABILITY LIMITED TO COST OF ANALYSIS. NVLAP ACCREDITATION APPLIES ONLY TO AHERA ANALYSIS 40CFR CH1 PART 763, APPENDIX A TO SUBPARTS C,F.